



Hinged gates

**"simple solutions
for complex needs"**



Features

Hinged gates with block frame

WHAT DEFINES THEM?

The field of use includes large openings and/or special usage conditions in customer-specified dimensions. Gates are supplied with leaves made of flush insulated sheets of metal panes, jointed and attached to each other with screws, "L"-profile block frame on three sides and finished with a base coat or RAL colours and other accessories as required for proper functioning of the product.

Standards


EI₂60, EI₂90 and EI₂120 gates are certified in accordance with the EN 1634 standard.

REI 120 gates are certified in accordance with the UNI 9723 standard.

Both gates are homologated in compliance with the current ministerial provisions in force.

Opening direction, pull

Opening direction needs to be specified while ordering.

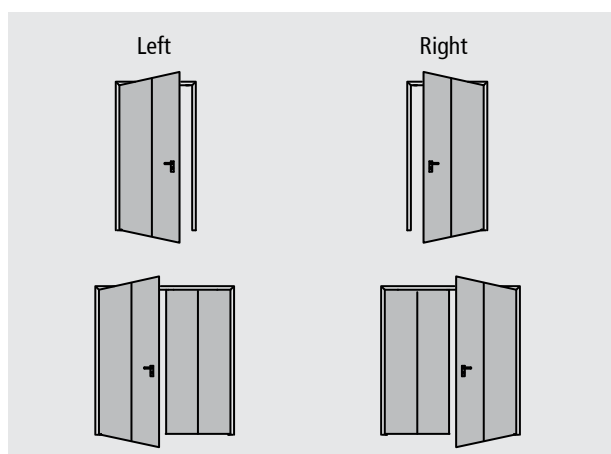

NOTE

Fire rated gates require careful design because of their dimensions and special functions. Every installation site should be measured and checked for vertical alignment of the walls and gradients of the flooring.

ATTENTION

Gates are supplied as a single pre-assembled unit, this should be kept in mind for purposes of handling. The customer assumes all risks entailed by the use of Hinged gates along escape routes.

For special applications consult the Ninz technical department.

Hinged one-leaved gate with block frame:

🔥 EI₂60 🔥 EI₂90 🔥 EI₂120 🔥 REI 120



Hinged two-leaved gate with block frame:

🔥 EI₂60 🔥 EI₂90 🔥 EI₂120 🔥 REI 120



Features

Hinged gates with block frame

El₂60, El₂90, El₂120 AND REI 120 ONE-LEAVED VERSION

This hinged gates series has the following features:

Application

For masonry walls, use plugs inside the span and corner steel outside the span (to be specified while ordering).

Door leaf

Leaf unit made of continuous modules of hollow-core sheet metal panels insulated with appropriate materials, without lower rebate. Nr. 2 extra-strong hinges for each leaf.

Doorframe

Made of galvanize "L"-shaped hollow metal profiles.

Hinges

Nr. 2 extra-strong hinges.

Sealing

Thermo-expansive, inserted into the leaf rebate.

Door handle

Accident-prevention shape, made of stainless steel with a double lever with return spring and set of plates. Handle height = 1050 mm.

Lock

CE marked lock with cylinder to pass.

Identification plate

Marking with reference information that is applied to the leaf's rebate.

Finishing

With a base coat thermoset in furnace, light turquoise pastel color (similar to NCS4020-B50G).

Packaging

Leaf unit on disposable metal container.

Wall opening dimensions L x H

class	min.	max.
El ₂ 60, El ₂ 90, El ₂ 120	1000 x 1750 mm	3337 x 3347 mm
REI 120	1000 x 1750 mm	5000 x 2500 mm * 2500 x 5000 mm *

* larger sizes on request

Mandatory accessories


1 CE-marked door closer per leaf.

Maximum opening


120° with door closer only, and 110° additional coil spring.

Thicknesses and weights

class	leaf thickness	weight/wall opening
El ₂ 60, El ₂ 90, El ₂ 120	s = 100 mm	approx. 70 kg/m ²
REI 120	s = 73 mm	approx. 60 kg/m ²

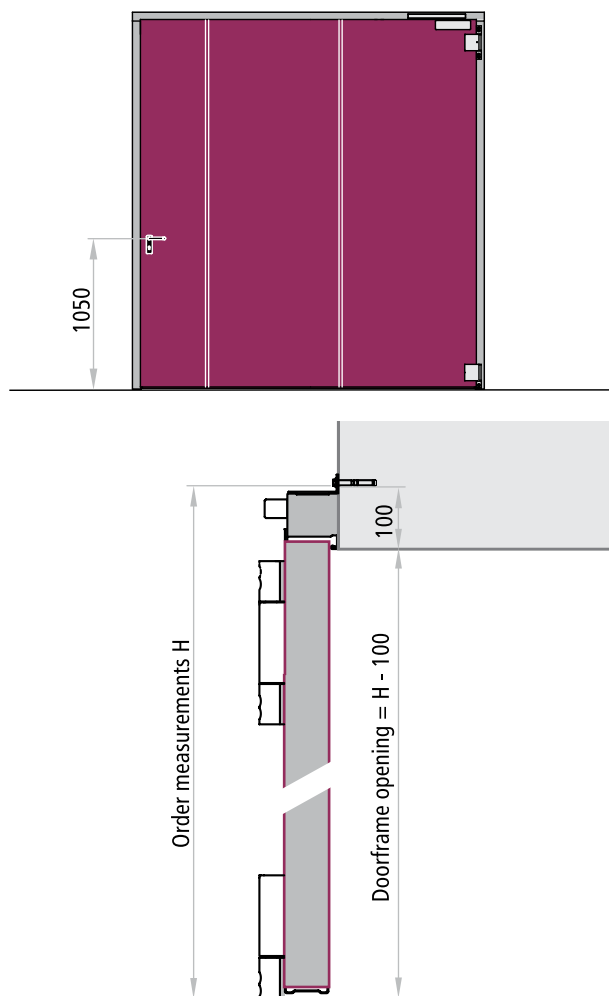

Vertical section for installation with block frame

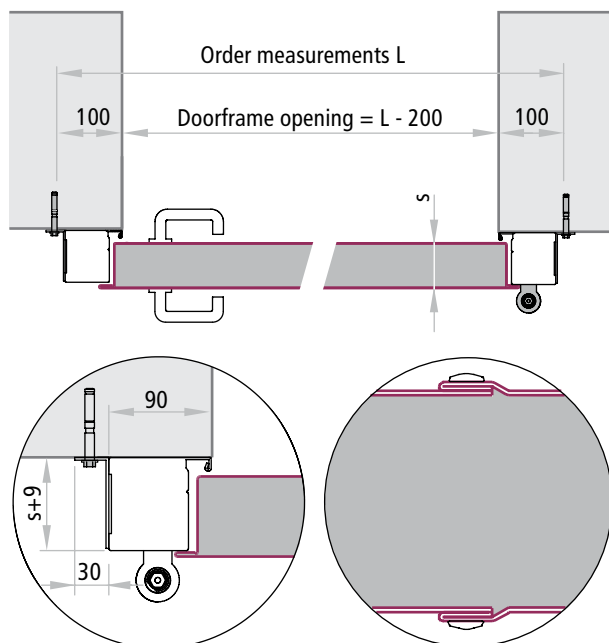

Detail of section for installation with block frame

Detail of panel joints

Features

Hinged gates with block frame



EI₂60, EI₂90, EI₂120 AND REI 120 TWO-LEAVED VERSION

This two-leaved vertically hinged gates series has the following features:

Installation

For masonry walls, use plugs inside the span and corner steel outside the span (to be specified while ordering).

Door leaf

Leaf unit made of continuous modules of hollow-core sheet metal panels insulated with appropriate materials, without lower rebate. Unequal divisions available on request.

Doorframe

Made of galvanized "L"-shaped hollow metal profiles.

Hinges

Nr. 2 extra-strong hinges for each leaf.

Sealing

Thermo-expansive, inserted into the leaf rebate.

Door handle

Accident-prevention shape, made of stainless steel with a double lever with return spring and set of plates. Handle height = 1050 mm.

Lock

Active (main) leaf: **CE** marked lock with cylinder to pass. Inactive leaf: "Flush-bolt" lock for automatic upper and lower blocking of the leaf.

Identification plate

Marking with reference information that is applied to the rebate of one of the leaves.

Finishing

With a base coat thermoset in furnace, light turquoise pastel color (similar to NCS4020-B50G).

Packaging

Leaf unit on disposable metal container.

Wall opening dimensions L x H

class	min.	max.
EI ₂ 60, EI ₂ 90, EI ₂ 120	2000 x 1750 mm	3337 x 3347 mm
REI 120	2000 x 1750 mm	5000 x 5000 mm *

Minimum division: 1000 mm.

* larger sizes on request

Mandatory accessories



1 door closer per leaf and 1 closing regulator for proper sequencing of leaf closure.

Maximum opening



120° with door closer only, and 110° additional coil spring.

Thicknesses and weights


class	leaf thickness	weight/wall opening
EI ₂ 60, EI ₂ 90, EI ₂ 120	s = 100 mm	approx. 70 kg/m ²
REI 120	s = 73 mm	approx. 60 kg/m ²

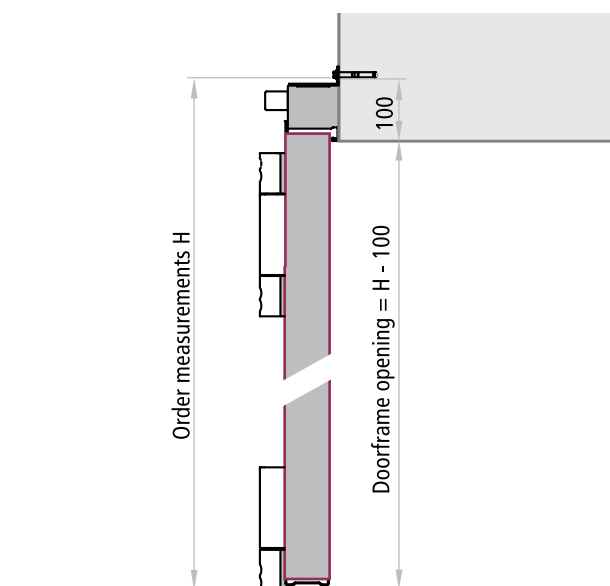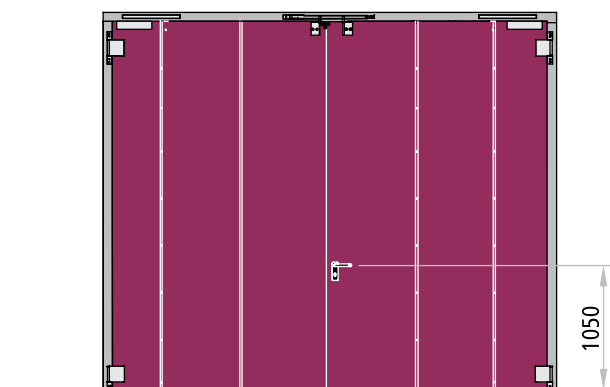

Vertical section for installation with block frame

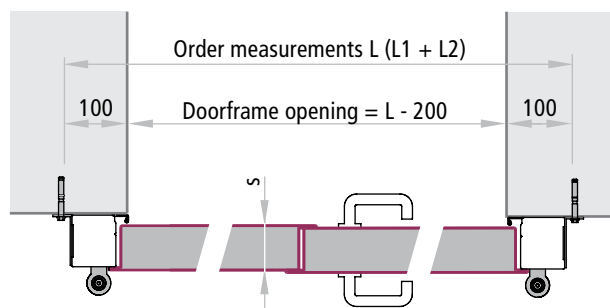

Detail of section for installation with block frame




Detail of panel joints

Applications and overall dimensions


Hinged one-leaved gate with block frame

NINZ
FIREDOORS

ONE-LEAVED INSTALLATION BEYOND THE REVEAL

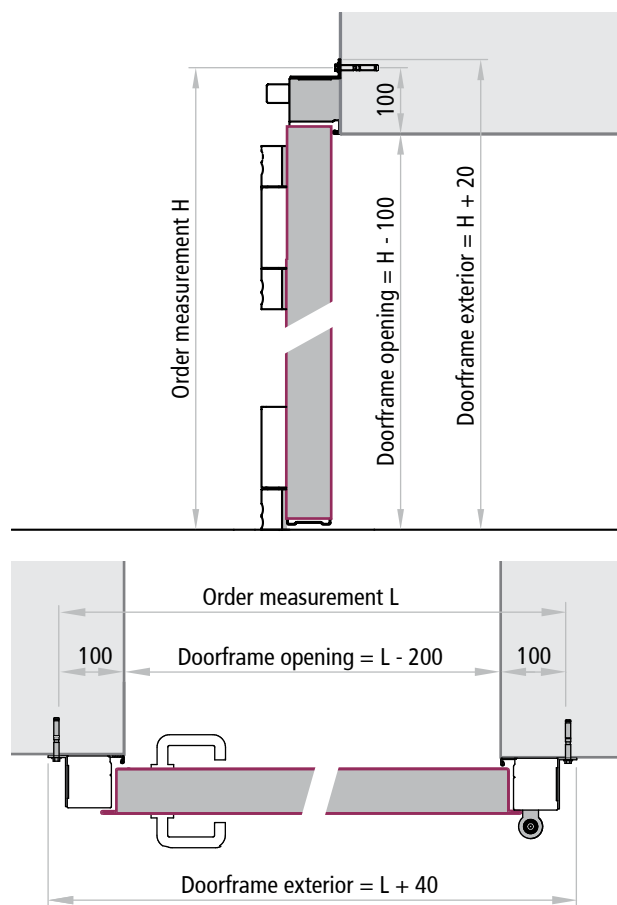


ONE-LEAVED INSTALLATION IN THE REVEAL

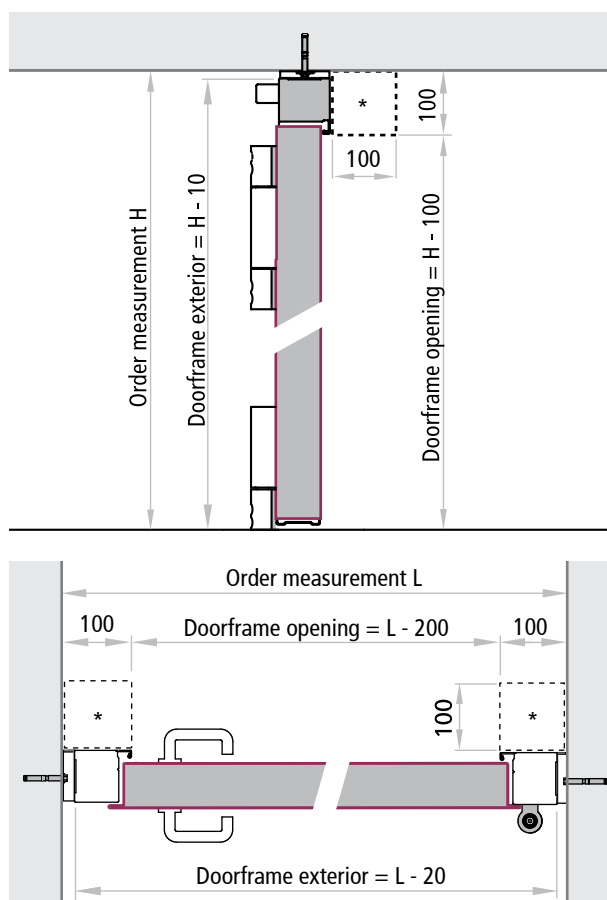

ONE-LEAVED DOOR OVERALL DIMENSIONS WITH 90° OPENING

*After the gate has been installed, the building of the additional apron is the buyer's responsibility and duty

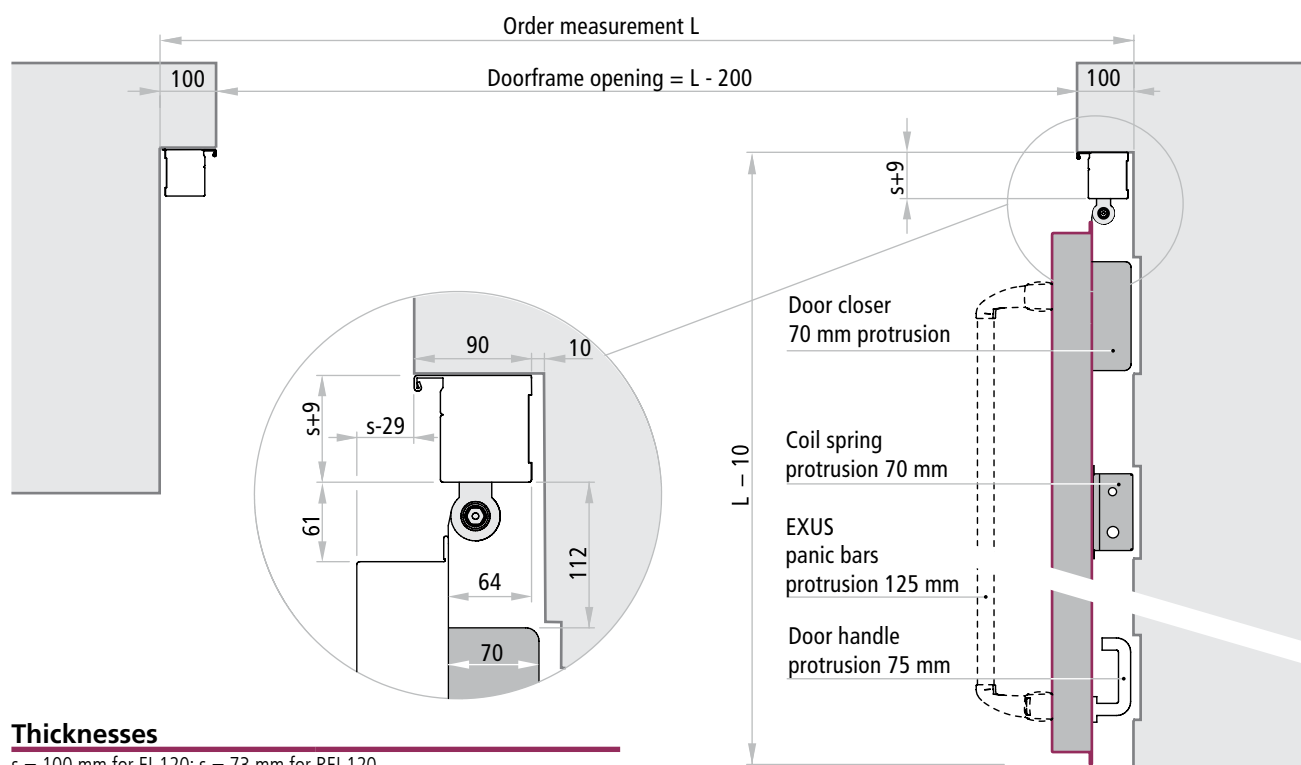


Thicknesses

s = 100 mm for EI₂120; s = 73 mm for REI 120


Applications and overall dimensions

Hinged two-leaved gates with block frame

TWO-LEAVED INSTALLATION BEYOND THE REVEAL

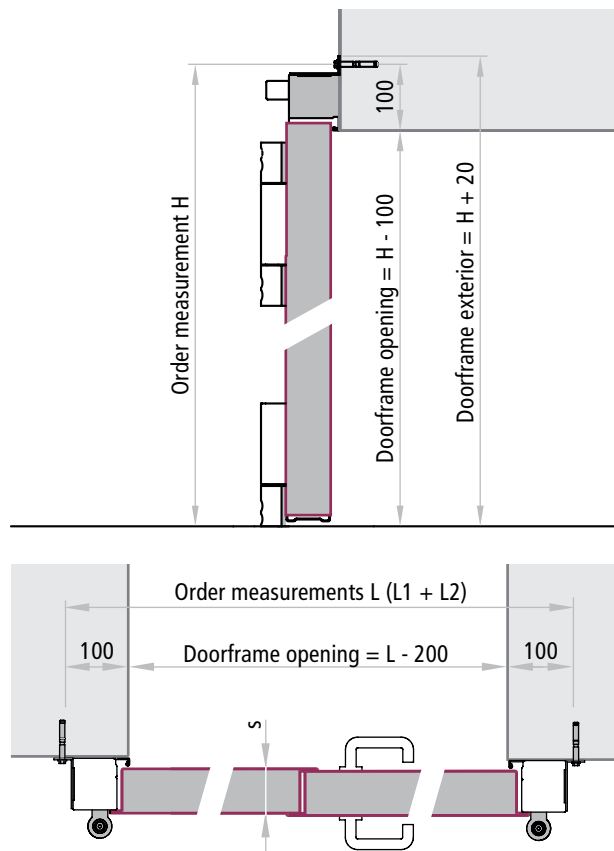


TWO-LEAVED INSTALLATION IN THE REVEAL

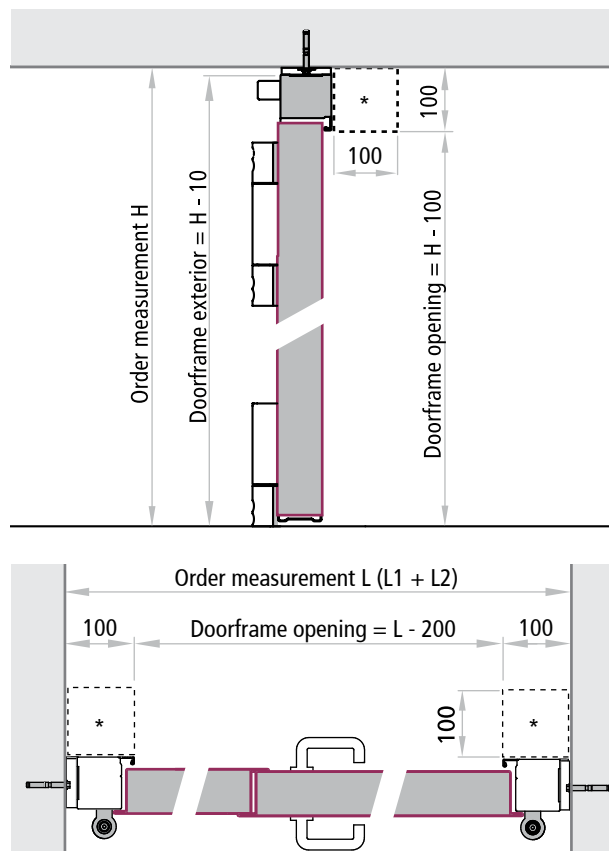

*After the gate has been installed, the building of the additional apron is the buyer's responsibility and duty

TWO-LEAVED DOOR OVERALL DIMENSIONS WITH 90° OPENING

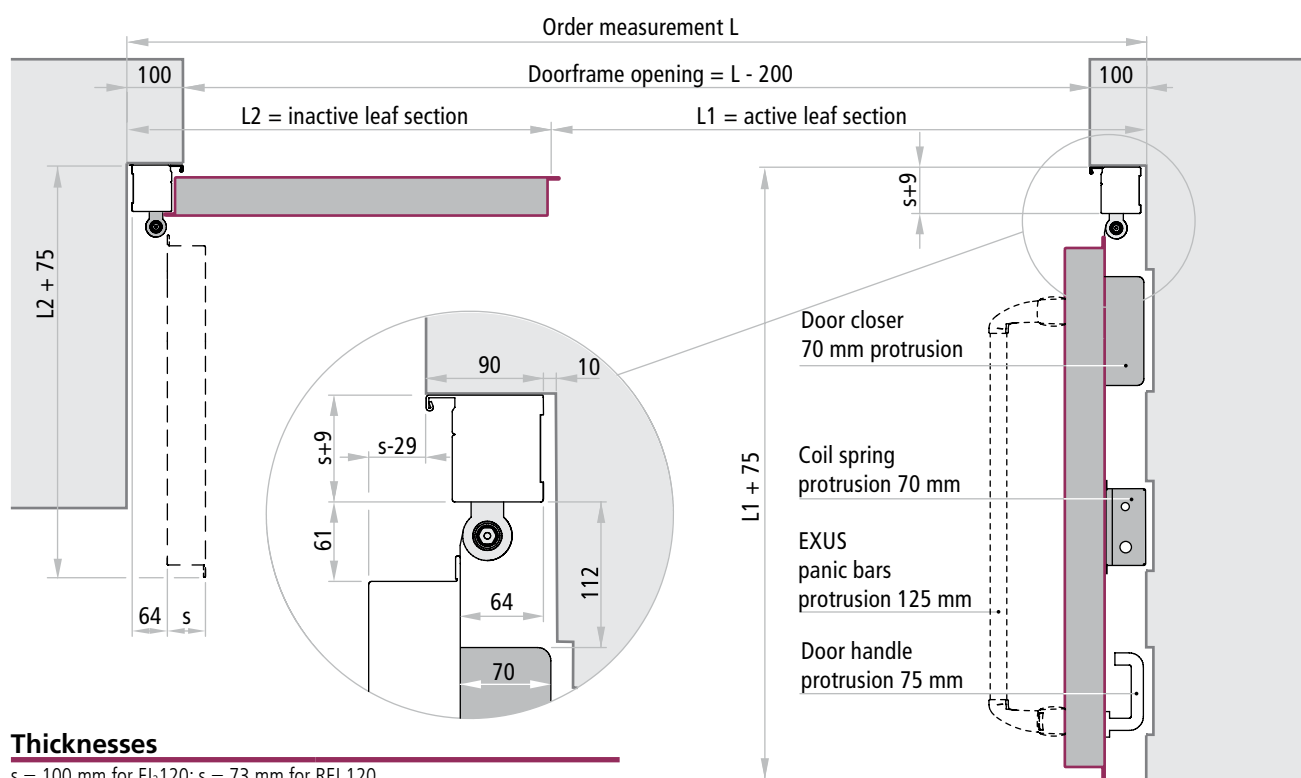

Thicknesses

s = 100 mm for EI₂120; s = 73 mm for REI 120

Mandatory accessories

Hinged gates with block frame

TS93 DOOR CLOSER

Door closer (1) with slide channel for large sizes, with regulation of opening force, closing velocity and final closure. Silver color.

CE certification 0432-BPR 0008 EN 1154:1996 + A1:2002


SR390 CLOSING REGULATOR

To ensure automatic closure of two-leaved fire rated gates, a door closing regulation is mandatory. The two-leaved gates door series, therefore, is provided with a Dorma SR 390 closing regulator (2), equipped with feed-in impact absorber and all mechanical functioning, mounted visibly on the doorframe. Silver-colored galvanized finishing, for on-site installation.

CE certification 0432-BPR 0026 EN 1158:1997+A1:2002

COIL SPRING

Coil spring (3) for large sized leaves to reinforce the door closer, with mechanical functioning and positioned high up on the hinge-side of the leaf (pull-side of the door). The steel tension cable is attached to the cross beam of the doorframe. Finished in the same color as the door leaf (except for replacements).

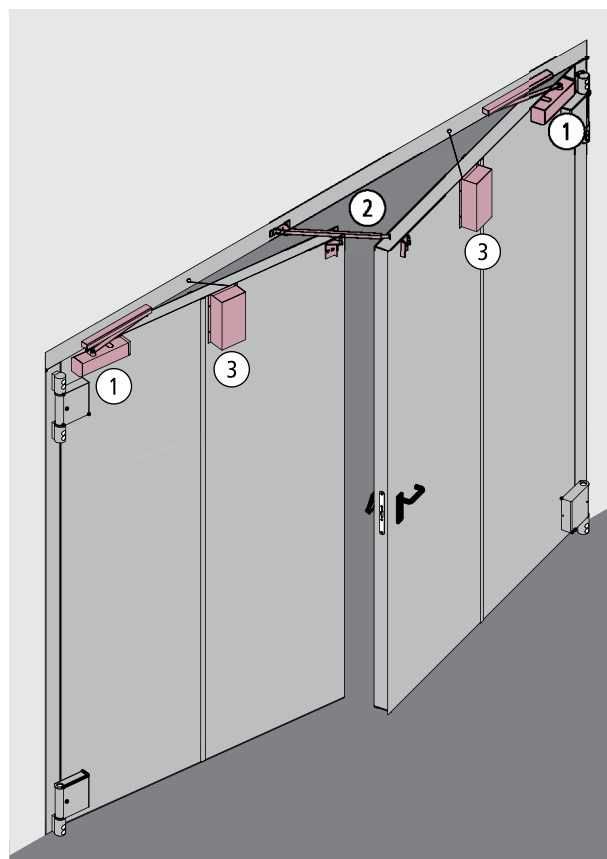

Optional accessories

Hinged gates with block frame

PAINTING

With ecologically formulated anti-corrosive epoxide primer. Minimum resistance to salt fog exposure: 300 hours (A.S.T.M. B - 117 - 61). Basic anti-corrosion coating: Light turquoise pastel.

Group 01 (Basic anti-corrosion coating only):

Light turquoise pastel
(similar to NCS4020-B50G)

RAL
7035



Group 02 (Basic anti-corrosion coating + satin topcoat finishing):

RAL 1001	RAL 1013	RAL 1015	RAL 3000	RAL 3003	RAL 3020	RAL 5010	RAL 5012
RAL 5015	RAL 5024	RAL 6000	RAL 6005	RAL 7001	RAL 7004	RAL 7011	RAL 7016
RAL 7024	RAL 7030	RAL 7032	RAL 7035	RAL 7037	RAL 7038	RAL 7040	RAL 7042
RAL 7047	RAL 8011	RAL 8017	RAL 8019	RAL 9001	RAL 9002	RAL 9005	RAL 9010
RAL 9011	RAL 9016	RAL 9018					

In general, all RAL colours are useable except for: RAL 1018 and RAL 5005

PRECAUTIONS

Installation

In case of exterior installation of the gates, in addition to use special paints which are especially designed for this kind of application (on request), in order to avoid any product degradation, it is important to:

- protect the gates from bad weather and water seeping in;
- avoid direct sun rays and the subsequent warping of the gate leaf, especially in case of darker colors.

For more details, refer to the "Notices" section of this brochure.

Cleaning

Water and neutral soap are recommended for the regular cleaning of our products. Do not use common cleaning products (see detergents) and/or other solvents. We shall not be held responsible for any problems that arise if these guidelines are not respected.



Group 03 (Basic anti-corrosion coating + satin topcoat finishing):

RAL 1004	RAL 1005	RAL 1006	RAL 1007	RAL 9006*	RAL 9007*
-------------	-------------	-------------	-------------	--------------	--------------

*Pre-approval of the sample is required.

Group 04 (Basic anti-corrosion coating + satin topcoat finishing):

RAL 1003	RAL 1012	RAL 1016	RAL 1021	RAL 1023	RAL 5002
-------------	-------------	-------------	-------------	-------------	-------------

Re-painting

For re-painting, use the following procedure:

- sand and carefully wipe away any dust from the surfaces
- apply a base coat of semi-gloss acrylic (we recommend the product ACRILFIN SL series 567 made by ELCROM - Italy + 20% by weight aliphatic hardener series E872003)
- repaint the surfaces with your choice of lacquers or paints.

Retouching

On request, Ninz also provides touch-up paint (nitro/synthetic) in 1,00 g cans in the necessary RAL colour.

Optional accessories



Hinged gates with block frame

EM/G1 WALL-MOUNTED ELECTROMAGNET WITH STRIKE PLATE ANCHORS

For smoke/heat detection systems, central control units and power supply, see the dedicated page in the accessories section of the present brochure.

Technical data for the EM/G1 electromagnet for leaves up to 5 m² of wall opening with a maximum leaf width of 1700 mm

power supply	24 V DC
current absorbed	70 mA
nominal power	2 W
force	> 55 Kg.
anti-magnetism	electromagnet endowed with pin
anti-jamming	internal varistor
conformity with standard	EN 1155





EM/G2 WALL-MOUNTED ELECTROMAGNET WITH STRIKE PLATE ANCHORS

For smoke/heat detection systems, central control units and power supply, see the dedicated page in the accessories section of the present brochure.

Technical data for the EM/G2 electromagnet for leaves up to 5 m² of wall opening or with leaf width greater than 1700 mm

power supply	24 V DC
current absorbed	70 mA
nominal power	2 W
force	> 140 Kg.
anti-magnetism	electromagnet endowed with pin
anti-jamming	connector with varistor
conformity with standard	EN 1155




NOTE

Position the anchor 200 mm from the external edge of the leaf and as far as possible from the hinges.

PANIC BARS

Exus LP, LX and Twist panic bars are suitable for one-leaved gates or active and inactive leaves of two-leaved gates, with dimensions up to 2000x3000mm/leaf and masses up to 300 kg/leaf. Height of central bar from finished floor level: 955mm in case of Exus; 965mm in case of Twist.

For more information, please see the panic bars section of the present brochure. Panic bars for the installation onto hinged gates are always supplied with a horizontal bar of 1500mm length and with stainless steel external door furniture.

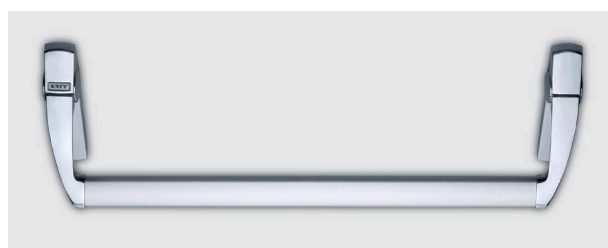

Exus LX

EXUS[®]

HINGED
gates



PRESENTATION

EXUS® panic bars

Ninz S.p.A. is a leader in fire doors, and has once again reasserted itself as a visionary company with a strong identity created by its continuous research into the design and technology of its own products, such as the new line of EXUS® panic bars.

The EXUS® panic bars are CE marked and according to European standard EN 1125:2008, which entered in effect January 01, 2010, and which prescribes a series of substantial changes that further extend the requirements for maximum safety and ease of opening.

The KIT designed for your needs

When ordered separately from the door, the EXUS® series of panic bars is provided in elegant and functional KITS packaged for presentation in the most appropriate format for distribution.

Packaging in KITS ensures customers, installers and therefore the final users that they are receiving a complete anti-panic system with fully corresponding parts which are all CE certified.

Finishing

Attention to detail and proportions are highlighted by select materials and finishing.

In addition to the **black PLASTIC** version combined with **anodized ALUMINUM** bars, new combinations include the all **brushed STAINLESS STEEL** version and the **polished chromed ALUMINUM** version combined with the **anodized ALUMINUM** bar. Many other color and surface combinations are possible for equally aesthetic solutions. The particular aesthetics of soft forms is one of the exclusive advantages of **EXUS® panic bars**, representing the fruit of designs generated in collaboration with Studio MM Design, which has been working with the company for many years.

Certifications and replacements

Given the importance of maintaining the entire system's CE conformity, special attention has been paid to replacement parts, which have been subjected to testing in accordance with the EN 1125:2008 standard due to their pivotal role in maintaining CE certification.

The only way to ensure that the products maintain their original characteristics over time is by using **original NINZ replacement parts**.

For this reason, the instructions for **EXUS® panic bars** include additional indications regarding proper installation and maintenance plus a exploded assembly drawing that specifies every smallest detail of the certified system with all of the references required for ordering replacement parts.

With the new EXUS® panic bar, NINZ S.p.A. demonstrates its willingness to believe in market development by investing in designs and company image in order to endow its own products with added value while maintaining highly competitive quality-price ratios.



Black PLASTIC handle



Brushed STAINLESS STEEL handle

NOTE

By default external door furniture is provided with the same finishing as the panic bar.


EXUS® - Features, certifications

Panic bar

NINZ
FIREDOORS

FEATURES

- Newly designed product with state of the art technological concept
- Available several in color and surface combinations: brushed stainless steel for the lever arms and the bar, or aluminum with polished chrome lever arms and anodized aluminum bar, and finally the classic ever-green combination - black plastic lever arms with anodized aluminum bar
- Certified for internal lock with 40 or 65mm entrances for single leaves or active leaves, with 30 or 80mm entrance for inactive leaves and with square spindle rotation of up to 45°
- Possibility of locking by key on the bar side as well
- Reversible for Right or Left mounting
- Protrusion 125mm
- Proposed together with the door or separately in a complete KIT packaged in a black/yellow box
- Label applied to the packaging to identify the product's characteristics
- Wide range of customizations: colored bar, colored or stainless steel handles, lock with access control mechanisms, special coded or mastered cylinders

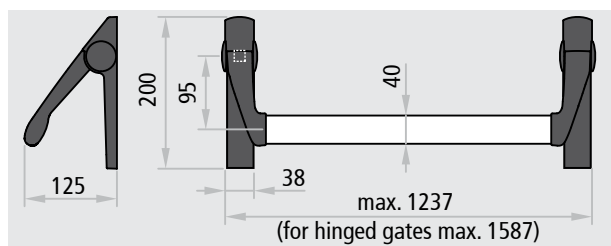

CERTIFICATION

Suited for one-leaved doors or the active and inactive leaves of two-leaved doors with dimensions up to 1350x2880mm/leaf, mass up to 300kg/leaf.

CE	
Denomination	EXUS PANIC BAR
Manufacturer	Ninz S.p.A. Corso Trento, 2/A I-38061 ALA (TN)/ITALY
Year application trademark	08
Nr. and year of the standard	EN 1125:2008
Certifying body	0425
CE certificate Nr.	0425 CPD 1228
Classification	3 7 7 B 1 3 2 1 A A

- 1st Category of use very frequent
- 2nd Durability 200.000 cycles
- 3rd Door mass over 200 kg
- 4th Suitable for fire/smoke rated doors
- 5th Safety, suitable for evacuation routes
- 6th High corrosion resistance 96 h
- 7th Material safety 1000 N
- 8th Bar protrusion up to 150 mm
- 9th Activation type with push bar
- 10th Suited for one- or two-leaved doors



EXUS® is a registered trademark owned by Ninz S.p.A.

Also suited for doors with fire ratings:



ATTESTATO DI CONFORMITÀ DIRETTIVA 89/106/CEE CERTIFICATE OF CONFORMITY DIRECTIVE 89/106/CEE		CE 0425
Questo certificato è rilasciato in conformità a quanto prescritto dall'Art.6 par.2 lettera b) del DPR 21 aprile 1993, n°246 (Direttiva 89/106/CEE) ed attesta la conformità del prodotto di seguito identificato agli Art.1, Art.2 ed allegato A del DPR 21 aprile 1993, n°246 (Direttiva 89/106/CEE). This certificate has been issued in conformity to what prescribed by the Art.6 par.2 letter b) of the DPR 21/04/1993, n°246 (Directive 89/106/CEE) and certifies the conformity of the product described below to the Art.1, Art.2 and attachment A of DPR 21/04/1993, n°246 (Directive 89/106/CEE).		
ATTESTATO N°	0425 CPD 1228	CERTIFICATE N°
Organismo notificato	ICIM S.p.A. - Piazza Don Mapelli, 75 - 20099 Sesto San Giovanni (MI) ITALY	Notified Body Identification number: 0425
Dati Fabbricante	NINZ S.p.A. Corso Trento, 2/A - 38061 ALA (TN) ITALY	Manufacturer Head office Operative unit
Dati prodotto	Product	
Tipologia	DISPOSITIVI ANTIPANICO PER USCITE DI SICUREZZA AZIONATI MEDIANTE UNA BARRA ORIZZONTALE PANIC EXIT DEVICES	
Denominazione	Dispositivo antipatico serie "TWIST" "EXUS LP" "EXUS LA" "EXUS LX".	Denominazione
Serrature antipatico	art. AP16/18, SCA 1 3201001.019020, MAC 1 3201001.041042, 4506002.17 (V), 3201001.018, 485-65-0, 4506002.22 (V), B18310-02-RL-8 (V), B18370-04-U-8 (V), art. AP020P, AP020U, 4506002.18 (V), 3201001.6, 43190-95, B1890-1004 (V).	
Controserrature antipatico	art. 3105080, 3105024, 4506003 (V), 3305003, B1795-0001 (V), B1895-0003 (V).	
Dispositivo superiore	art. 2401036, 2401046, 2401044, 4506005 (V), 2401002, B9000-0567 (V), B9000-0490 (V).	
Riscontro asta	art. 2401001, 2401007, 3105091, 4509006 (V), 2401020, 4419008, B9028-0001 (V).	
Boccola pavimento	art. 4201010.	
Deviatori	art. 3305015, 3305016, 3305002, 4509003 (V), 3305013, 990837, B9006-0014 (V), B9006-0005 (V).	
Aste verticali	art. 2401006, 2401026, 2401015, 2401014, 4506006 (V), 2401005, 2401035, 3412001, B9000-0402 (V).	
Riscontro serratura	art. BM, BSP, BS, BMC, BC, B, A, BM inox, BM alu, BSP inox, BSP alu.	
Comandi esterni		
Sistema di attestazione della conformità	1	Attestation of conformity
Norma di riferimento	EN1125:2008	Standard
Classificazione	3 7 7 B 1 3 2 1 A A	Classification
Eventuali estensioni	Nessuna / None	Extensions
Eventuali condizioni di subordinazione della Certificazione CE	Nessuna / None	Possible conditions of subordination of the CE Certification
Il presente attestato è valido esclusivamente per il prodotto indicato. Eventuali varianti da apportare devono essere approvate da ICIM SpA. The present issue is valid only for the product described above. Possible changes to be brought in have to be approved by ICIM S.p.A.		
Data di emissione First issue	Emissione corrente Current issue	Data di scadenza Expiring date
18/04/2007	26/06/2013	17/04/2017
		ICIM S.p.A.

EXUS® LP IN BLACK PLASTIC




Description

The EXUS LP panic bar consists of an anodized aluminum horizontal bar that inserts into the lever arms attached to the mechanisms which activate the lock.

- Reversible for right or left opening
- For application to single leaf and two-leaved doors
- Suited for Rever/Univer/Proget doors and other types of panic exit doors
- The horizontal bar is made of extruded anodized aluminum with an elliptical cross-section measuring 40x20mm and a length of 1150mm
- Two black plastic lever arms with galvanized steel core
- The two mechanisms are made of galvanized steel with black plastic carter covers, one of which has an EXIT label that identifies the lock side
- The lock is anti-panic/fire rated for Euro profile cylinders
- The door furnitures and related cover plates are made of black plastic, while the installation plate is made of galvanized steel
- DC version with cylinder to pass

VERSIONS AVAILABLE




BM

BSP

BS

BMC

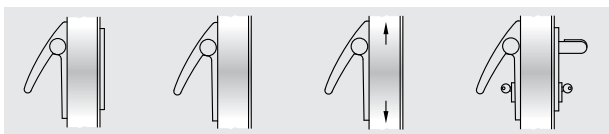


BC

B

A

DC BM

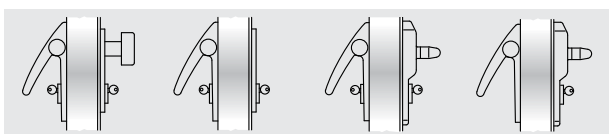

DC BSP

DC BS

DC ELM

ELM

VARIATIONS ON REQUEST (see dedicated page)

- Aluminum bar painted in RAL colors
- External BM, BSP, BS, BMC and BC door furnitures in brushed stainless steel
- External BM and BSP door furnitures painted in RAL colors
- MAC1 panic lock with access control system, combinable with the BM and DC BM versions
- Mastered or coded cylinders
- Microswitch and cable sleeve for signaling when the door is open

EXUS LP (SUPPLIED WITH THE DOOR)

For single leaf or the active leaf of two-leaved doors:

Included (mounted on the door): the anti-panic lock with 65mm entrance and the strike box lock insert

Included (in the package): Nr. 2 mechanisms, Nr. 2 black plastic carter covers, Nr. 2 black plastic lever arms, Nr. 1 anodized aluminum bar, Nr. 1 black plastic external door furniture, Nr. 1 half-cylinder with 3 keys, Nr. 1 cylinder to pass with 3 keys (DC version only), Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: BM, BSP, BS, BMC, BC, B (for Proget doors only), DC BM, DC BSP, DC BS, DC ELM, ELM

ELM electric handle: see the dedicated pages

For the inactive leaf of two-leaved doors:

Included (mounted on the door): anti-panic safety lock with 80mm entrance, the upper re-latch device, the upper strike plate and the vertical rods

Included (in the package): Nr. 2 mechanisms, Nr. 2 black plastic carter covers, Nr. 2 black plastic lever arms, Nr. 1 anodized aluminum bar, Nr. 1 floor-mounted floor catch, Nr. 1 carrier arm (for fire doors only), Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: A

EXUS LP KIT

(SUPPLIED SEPARATELY FROM THE DOOR)

KIT for single leaf or the active leaf of two-leaved doors:

Please specify leaf thickness and door type - REVER, UNIVER or PROGET - in the order

KIT contents: Nr. 1 anti-panic lock with 65mm entrance, Nr. 1 strike box lock insert, Nr. 2 mechanisms, Nr. 2 black plastic carter covers, Nr. 2 black plastic lever arms, Nr. 1 anodized aluminum bar, Nr. 1 black plastic external door furniture, Nr. 1 half-cylinder with 3 keys, Nr. 1 cylinder to pass with 3 keys (DC version only), Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: BM, BSP, BS, BMC, BC, DC BM, DC BSP, DC BS

KIT for the inactive leaf of two-leaved doors, suited for REVER, UNIVER and PROGET fire and multipurpose doors (produced after 01.01.2005):

specify door type on the order form

KIT contents: Nr. 1 anti-panic safety lock with 80mm entrance, Nr. 2 mechanisms, Nr. 2 black plastic carter covers, Nr. 2 black plastic lever arms, Nr. 1 anodized aluminum bar, Nr. 1 upper re-latch device, Nr. 1 floor-mounted floor catch, Nr. 1 carrier arm (excluding REVER and UNIVER MULTIPURPOSE), Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: A

KIT for the inactive leaf of two-leaved doors and suited for other types of multipurpose doors and for substitution of non CE marked panic bars (PROGET doors):

KIT contents: Nr. 1 anti-panic safety lock with 80mm entrance, Nr. 2 mechanisms, Nr. 2 black plastic carter covers, Nr. 2 black plastic lever arms, Nr. 1 anodized aluminum bar, Nr. 1 upper re-latch device, Nr. 1 upper strike plate, vertical rods, Nr. 1 floor-mounted floor catch, Nr. 1 carrier arm, Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: A

EXUS® LX IN STAINLESS STEEL




Description

The entire EXUS LX panic bar is made of stainless steel, and consists of a horizontal bar that inserts into lever arms attached to the mechanisms which activate the lock.

- Maximum corrosion resistance and noteworthy robustness of the entire set
- Optimal aesthetic appearance
- Reversible for right or left opening
- For application to single leaf and two-leaved doors
- Suited for Rever/Univer/Proget doors and other types of panic exit doors
- The horizontal bar is made of AISI 304 brushed stainless steel with an elliptical cross-section measuring 40x20mm, length of 1150mm
- The two lever arms are made of AISI 304 brushed stainless steel
- The two mechanisms are made of AISI 304 stainless steel
- The two carter covers are made of AISI 304 brushed stainless steel, and one is labeled with EXIT to identify the lock side
- The lock is anti-panic/fire rated for Euro profile cylinders
- The door furnitures and related cover plates are made of AISI 304 brushed stainless steel, while the installation plate is made of galvanized steel
- DC version with cylinder to pass

VERSIONS AVAILABLE

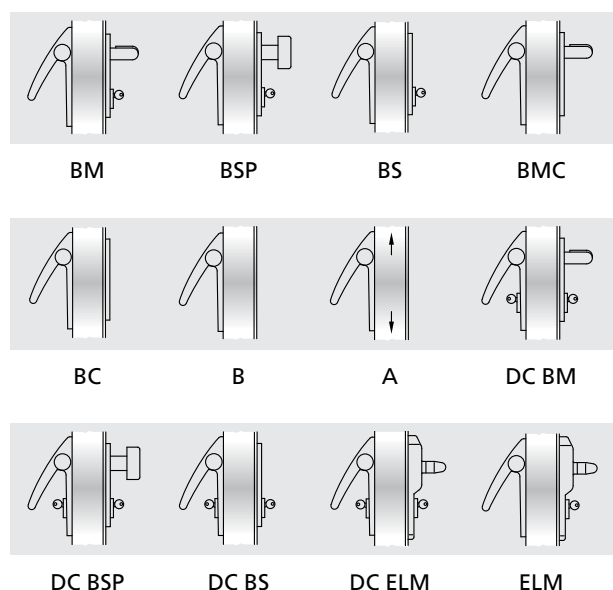

VARIATIONS ON REQUEST (see dedicated page)

- MAC1 panic lock with access control system, combinable with the BM and DC BM versions
- Mastered or coded cylinders
- Microswitch and cable sleeve for signaling when the door is open

EXUS LX (SUPPLIED WITH THE DOOR)

For single leaf or the active leaf of two-leaved doors:

Included (mounted on the door): the anti-panic lock with 65mm entrance and the strike box lock insert

Included (in the package): Nr. 2 stainless steel mechanisms, Nr. 2 stainless steel carter covers, Nr. 2 stainless steel lever arms, Nr. 1 stainless steel bar, Nr. 1 stainless steel external door furniture, Nr. 1 half-cylinder with 3 keys, Nr. 1 cylinder to pass with 3 keys (DC version only), Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: BM, BSP, BS, BMC, BC, B (for Proget doors only), DC BM, DC BSP, DC BS, DC ELM, ELM

ELM electric handle: see the dedicated pages

For the inactive leaf of two-leaved doors:

Included (mounted on the door): anti-panic safety lock with 80mm entrance, the upper re-latch device, the upper strike plate and the vertical rods

Included (in the package): Nr. 2 stainless steel mechanisms, Nr. 2 stainless steel carter covers, Nr. 2 stainless steel lever arms, Nr. 1 stainless steel bar, Nr. 1 floor-mounted floor catch, Nr. 1 carrier arm (for fire doors only), Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: A

EXUS LX KIT

(SUPPLIED SEPARATELY FROM THE DOOR)

KIT for single leaf or the active leaf of two-leaved doors:

Please specify leaf thickness and door type - REVER, UNIVER or PROGET - in the order

KIT contents: Nr. 1 anti-panic lock with 65mm entrance, Nr. 1 strike box lock insert, Nr. 2 stainless steel mechanisms, Nr. 2 stainless steel carter covers, Nr. 2 stainless steel lever arms, Nr. 1 stainless steel bar, Nr. 1 stainless steel external door furniture, Nr. 1 half-cylinder with 3 keys, Nr. 1 cylinder to pass with 3 keys (DC version only), Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: BM, BSP, BS, BMC, BC, DC BM, DC BSP, DC BS

KIT for the inactive leaf of two-leaved doors, suited for REVER, UNIVER and PROGET fire and multipurpose doors (produced after 01.01.2005):

specify door type on the order form
KIT contents: Nr. 1 anti-panic safety lock with 80mm entrance, Nr. 2 stainless steel mechanisms, Nr. 2 stainless steel carter covers, Nr. 2 stainless steel lever arms, Nr. 1 stainless steel bar, Nr. 1 upper re-latch device, Nr. 1 floor-mounted floor catch, Nr. 1 carrier arm (excluding REVER and UNIVER MULTIPURPOSE), Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: A

KIT for the inactive leaf of two-leaved doors and suited for other types of multipurpose doors and for substitution of non CE marked panic bars (PROGET doors):

KIT contents: Nr. 1 anti-panic safety lock with 80mm entrance, Nr. 2 stainless steel mechanisms, Nr. 2 stainless steel carter covers, Nr. 2 stainless steel lever arms, Nr. 1 stainless steel bar, Nr. 1 upper re-latch device, Nr. 1 upper strike plate, vertical rods, Nr. 1 floor-mounted floor catch, Nr. 1 carrier arm, Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: A

Twist

HINGED
gates



PRESENTATION

TWIST panic bars

TWIST panic bars are **CE** marked in accordance with European standard EN 1125:2008, which entered in effect January 01, 2010, and which prescribes a series of substantial changes that further extend the requirements for maximum safety and ease of opening.

The KIT designed for your needs

When ordered separately from the door, the **TWIST** series of panic bars is provided in elegant and functional KITS packaged for presentation in the most appropriate format for distribution.

Packaging in KITS ensures customers, installers and therefore the final users that they are receiving a complete anti-panic system with fully corresponding parts that are all **CE** certified.

Finishing

The **TWIST** panic bar series is proposed in a **black PLASTIC** version combined with an **anodized ALUMINUM** bar. On request, the bar and the door furniture may be painted in RAL colors, opening up an infinite variety of aesthetic solutions.

Certifications and replacements

Given the importance of maintaining the entire system's **CE** conformity, special attention has been paid to replacement parts, which have been subjected to testing in accordance with the EN 1125:2008 standard due to their pivotal role in maintaining **CE** certification.

The only way to ensure that the products maintain their original characteristics over time is by using **original NINZ replacement parts**.

For this reason, the instructions for **TWIST** panic bars include additional indications regarding proper installation and maintenance plus an explosion assembly drawing that specifies every smallest detail of the certified system with all of the references required for ordering replacement parts.

With the new packaging of the TWIST panic bar, NINZ S.p.A. demonstrates its intent to believe in market development by investing in designs and company image in order to endow its own products with added value while maintaining highly competitive quality-price ratios.



Black PLASTIC handle

NOTE

The TWIST exit device series is combined with a black PLASTIC handle.


TWIST - Features, certifications

Panic bar

NINZ
FIREDOORS

FEATURES

- The classic line of panic bars, an ever-green, available in the standard combination with black plastic arms/caps and anodized aluminum bar
- Certified for internal locks with a 65mm entrance for single leaves or active leaves, and with an 80mm entrance for inactive leaves
- Reversible for mounting on Right or Left doors
- Protrusion 100mm
- Proposed together with the door or separately in a complete KIT packaged in a single black/green box
- Packaging is labeled to identify product characteristics
- Wide range of customizations: colored bar, colored or stainless steel handles, locks with access control systems, special coded or mastered cylinders

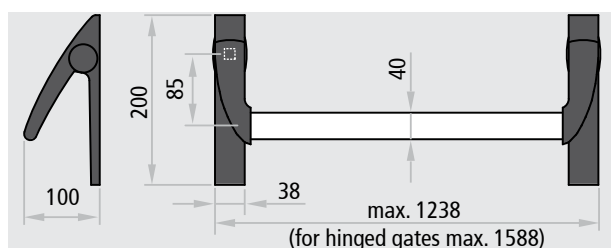

Also suited for doors with fire ratings:

EI₁₂₀ REI 120 smoke resistant



CERTIFICATION

Suited for one-leaved doors or the active and inactive leaves of two-leaved doors with dimensions up to 1350x2880mm/leaf, mass up to 300kg/leaf.

Denomination	TWIST PANIC BAR
Manufacturer	Ninz S.p.A. Corso Trento, 2/A I-38061 ALA (TN)/ITALY
Year application trademark	08
Nr. and year of the standard	EN 1125:2008
Certifying body	0425
CE certificate Nr.	0425 CPD 1228
Classification	3 7 7 B 1 3 2 1 A A

- 1st Category of use very frequent
- 2nd Durability 200.000 cycles
- 3rd Door mass over 200 kg
- 4th Suitable for fire/smoke rated doors
- 5th Safety, suitable for evacuation routes
- 6th High corrosion resistance 96 h
- 7th Material safety 1000 N
- 8th Bar protrusion up to 150 mm
- 9th Activation type with push bar
- 10th Suitable for one- or two-leaved doors

ATTESTATO DI CONFORMITÀ DIRETTIVA 89/106/CEE CERTIFICATE OF CONFORMITY DIRECTIVE 89/106/CEE		CE 0425
Questo certificato è rilasciato in conformità a quanto prescritto dall'Art.6 par.2 lettera b) del DPR 21 aprile 1993, n°246 (Direttiva 89/106/CEE) ed attesta la conformità del prodotto di seguito identificato agli Art.1, Art.2 ed allegato A del DPR 21 aprile 1993, n°246 (Direttiva 89/106/CEE)		
This certificate has been issued in conformity to what prescribed by the Art.6 par.2 letter b) of the DPR 21/04/1993, n°246 (Directive 89/106/CEE) and certifies the conformity of the product described below to the Art.1, Art.2 and attachment A of DPR 21/04/1993, n°246 (Directive 89/106/CEE)		
ATTESTATO N°	0425 CPD 1228	CERTIFICATE N°
Organismo notificato	ICIM S.p.A. - Piazza Don Mapelli, 75 - 20099 Sesto San Giovanni (MI) ITALY	Notified Body
Dati Fabbricante	NINZ S.p.A. Corso Trento, 2/A - 38061 ALA (TN) ITALY	Manufacturer
Sede legale		Head office
Unità operativa		Operative unit
Dati prodotto	Product Type	
Tipologia	DISPOSITIVI ANTIPANICO PER USCITE DI SICUREZZA AZIONATI MEDIANTE UNA BARRA ORIZZONTALE PANIC EXIT DEVICES	
Denominazione	Dispositivo antipanico serie "TWIST" "EXUS LP" "EXUS LA" "EXUS LX". Serrature antipanico art. AP16/18, SCA 1 3201001.019/020, MAC 1 3201001.041/042, 4506002.17 (V), 3201001.018, 485-65-0, 4506002.22 (V), B18310-02-RL-8 (V), B18370-04-U-8 (V), art. AP020P, AP020U, 4506002.18 (V), 3201001.6, 43190-95, B1890.1004 (V), Controserrature antipanico art. 3105080, 3105024, 4506003 (V), 3305003, B1795.0001 (V), B1895.0003 (V), Dispositivo superiore art. 2401036, 2401046, 2401044, 4506005 (V), 2401020, B9000.0567 (V), B9000.0490 (V), Riscintro asta art. 2401001, 2401007, 3105091, 4506006 (V), 2401020, 4419008, B9028.0001 (V), Boccola pavimento art. 4201010, Deviatori art. 3305015, 3305016, 3305002, 4506003 (V), 3305013, 960837, B9006.0014 (V), B9006.0005 (V), Aste verticali art. 2401006, 2401005, 2401015, 2401014, 4506006 (V), 2401006, 2401035, 3412001, B9000.0402 (V), Riscintro serratura art. BM, BSP, BS, BMC, BC, B, A, BM inox, BM alu, BSP inox, BSP alu, Comandi esterni	Denominazione
Sistema di attestazione della conformità	1	Attestation of conformity
Norma di riferimento	EN1125:2008	Standard
Classificazione	3 7 7 B 1 3 2 1 A A	Classification
Eventuali estensioni	Nessuna / None	Extensions
Eventuali condizioni di subordinazione della Certificazione CE	Nessuna / None	Possible conditions of subordination of the CE Certification
Il presente attestato è valido esclusivamente per il prodotto indicato. Eventuali varianti da apportare devono essere approvate da ICIM S.p.A. The present issue is valid only for the product described above. Possible changes to be brought in have to be approved by ICIM S.p.A.		
Data di emissione First issue	Emissione corrente Current issue	Data di scadenza Expiring date
18/04/2007	26/06/2013	17/04/2017
		ICIM S.p.A.

TWIST IN BLACK PLASTIC




Description

The TWIST plastic panic bar consists of an anodized aluminum horizontal bar that inserts into the lever arms attached to the mechanisms used to activate the lock.

- Reversible for right or left opening
- For application to single leaf and two-leaved doors
- Suited for Rever/Univer/Proget doors and other types of panic exit doors
- The horizontal bar is made of extruded anodized aluminum with an elliptical cross-section measuring 40x20mm and a length of 1150mm
- Two black plastic lever arms with galvanized steel core
- The two mechanisms are made of galvanized steel with black plastic carter covers, one of which has an EXIT label that identifies the lock side
- The lock is anti-panic/fire resistance for Euro profile cylinders
- The door furnitures and the cover plates are made of black plastic, while the installation plate is made of galvanized steel

VERSIONS AVAILABLE

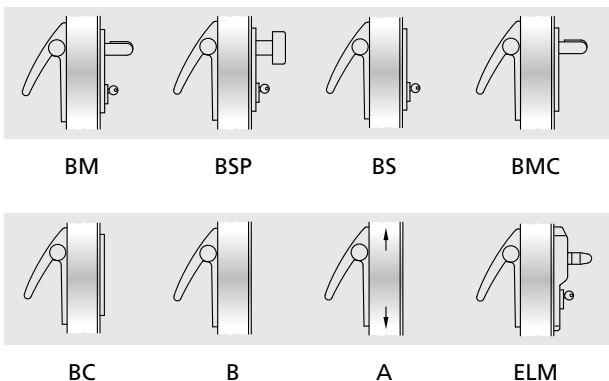

VARIATIONS ON REQUEST (see dedicated page)

- Aluminum bar painted in RAL colors
- External BM, BSP, BS, BMC and BC commands in brushed stainless steel
- External BM and BSP commands painted in RAL colors
- MAC1 panic lock with access control mode, combinable with the BM version
- Mastered or encrypted cylinders
- Microswitch and cable sleeve for signaling when the door is open

TWIST (SUPPLIED WITH THE DOOR)

For single leaf or the active leaf of two-leaved doors:

Included (mounted on the door): the anti-panic lock with 65mm entrance and the strike box lock insert

Included (in the package): Nr. 2 mechanisms, Nr. 2 black plastic carter covers, Nr. 2 black plastic lever arms, Nr. 1 anodized aluminum bar, Nr. 1 black plastic external door furniture, Nr. 1 half-cylinder with 3 keys, Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: BM, BSP, BS, BMC, BC, B (for Proget doors only), ELM

ELM electric handle: see the dedicated pages

For the inactive leaf of two-leaved doors:

Included (mounted on the door): anti-panic safety lock with 80mm entrance, the upper re-latch device, the upper strike plate and the vertical rods

Included (in the package): Nr. 2 mechanisms, Nr. 2 black plastic carter covers, Nr. 2 black plastic lever arms, Nr. 1 anodized aluminum bar, Nr. 1 floor-mounted door catch, Nr. 1 carrier arm (for fire doors only), Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: A

TWIST KIT

(SUPPLIED SEPARATELY FROM THE DOOR)

KIT for single leaf or the active leaf of two-leaved doors:

Please specify leaf thickness and door type - REVER, UNIVER or PROGET - in the order

KIT contents: Nr. 1 anti-panic lock with 65mm entrance, Nr. 1 strike box lock insert, Nr. 2 mechanisms, Nr. 2 black plastic carter covers, Nr. 2 black plastic lever arms, Nr. 1 anodized aluminum bar, Nr. 1 black plastic external door furniture, Nr. 1 half-cylinder with 3 keys, Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: BM, BSP, BS, BMC, BC

KIT for the inactive leaf of two-leaved doors, suited for REVER, UNIVER and PROGET fire and multipurpose doors (produced after 01.01.2005): specify door type on the order form

KIT contents: Nr. 1 anti-panic safety lock with 80mm entrance, Nr. 2 mechanisms, Nr. 2 black plastic carter covers, Nr. 2 black plastic lever arms, Nr. 1 anodized aluminum bar, Nr. 1 upper re-latch device, Nr. 1 floor-mounted floor catch, Nr. 1 carrier arm (excluding REVER and UNIVER MULTIPURPOSE), Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: A

KIT for the inactive leaf of two-leaved doors and suited for other types of multipurpose doors and for substitution of non CE marked panic bars (PROGET doors):

KIT contents: Nr. 1 anti-panic safety lock with 80mm entrance, Nr. 2 mechanisms, Nr. 2 black plastic carter covers, Nr. 2 black plastic lever arms, Nr. 1 anodized aluminum bar, Nr. 1 upper re-latch device, Nr. 1 upper strike plate, vertical rods, Nr. 1 floor-mounted floor catch, Nr. 1 carrier arm, Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: A

Features

Hinged gates with angular frame

WHAT DEFINES THEM?

The field of use includes large openings and/or special usage conditions in customer-specified dimensions. Gates are supplied with leaves made of flush insulated sheets of metal panes soldered together, "Z"-profile angular frame on three sides and finished with a base coat or RAL colours and other accessories as required for proper functioning of the product.

Standards


The hinged EI₂120 gates with pedestrian door are certified in accordance with the EN 1634 standard.

The hinged REI 120 gates are certified in accordance with the UNI 9723 standard.

Both gates are homologated in compliance with the current ministerial provisions in force.

Opening direction, pull

Opening direction needs to be specified while ordering.

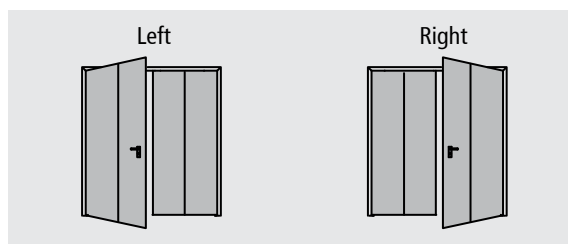

NOTE

Fire rated gates require careful design which reflects their dimensions and special functions. Every installation site should be measured and checked for vertical alignment of the walls and gradients of the flooring.

ATTENTION

Gates are supplied as a single pre-assembled unit, this should be kept in mind for purposes of handling. The customer assumes all risks entailed by the use of Hinged gates along escape routes.

For special applications consult with our technical department.

Hinged two-leaved gate with angular frame:

 EI₂120  REI 120



Features

Hinged gates with angular frame

NINZ
FIREDOORS

TWO-LEAVED REI 120 VERSION

TWO-LEAVED EI₂120 VERSION WITH PEDESTRIAN DOOR

This hinged gates has the following features:

Application

For solid walls with installation with wall anchors or screws and plugs or for frames installed onto sub-frame with plasterboard lining.

Door leaves

Leaf unit made of continuous modules of hollow-core sheet metal panels insulated with the appropriate materials, without lower rebate. Leaf thickness 73 mm for all versions. Unequal divisions available on request.

Doorframe

Made of galvanized sheet metal with a "Z"-shaped hollow metal profiles.

Hinges

Nr. 2 extra-strong drain-type hinges for each leaf.

Sealing

Thermo-expansive, inserted into the leaf rebate.

Door handle

Accident-prevention shape, made of stainless steel with a double lever with return spring and set of plates. Handle height = 1050 mm.

Lock

Active (main) leaf: **CE**-marked lock with cylinder to pass. Inactive leaf: "Flush-bolt" lock for automatic upper and lower blocking of the leaf.

Identification plate

Marking with reference information that is applied to the rebate of one of the leaves.

Finishing

With thermoset epoxy-polyester powders, with orange skin anti-scratch finishing, turquoise pastel color - light tone (NC54020-B50G) for gates maximum H = 5000 mm.

Packaging

Leaf unit on disposable metal container.

Wall opening dimensions L x H

class	min.	max.
EI ₂ 120, REI 120	2000 x 1750 mm	6000 x 5000 mm *

Minimum division: 650 mm.

* italian homologation only, larger sizes on request

Mandatory accessories





1 door closer per leaf and 1 closing regulator for proper sequencing of leaf closure.

Maximum opening

120° with door closer only.

Weight

Gate weight, approx. 60 kg/m² of wall opening for EI₂120 and REI 120 versions.

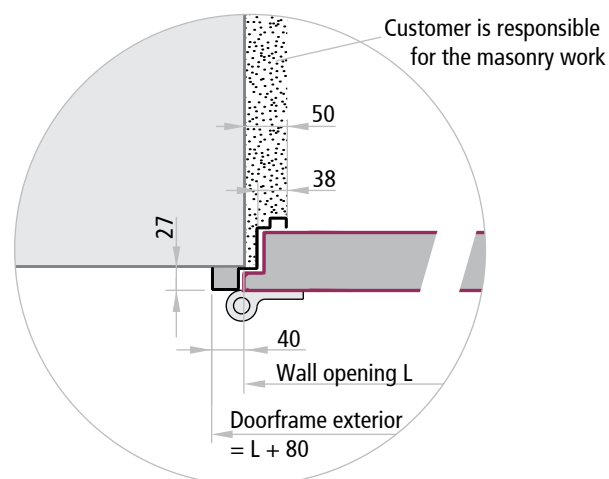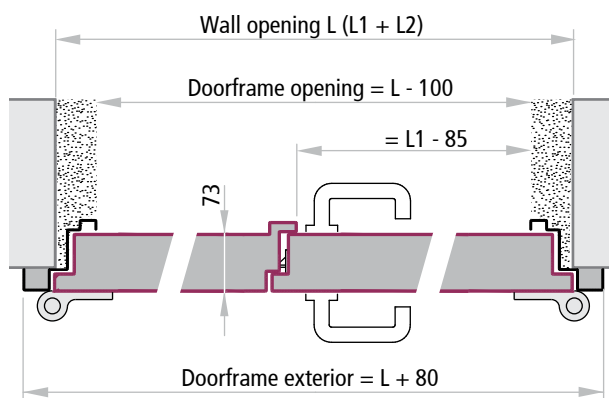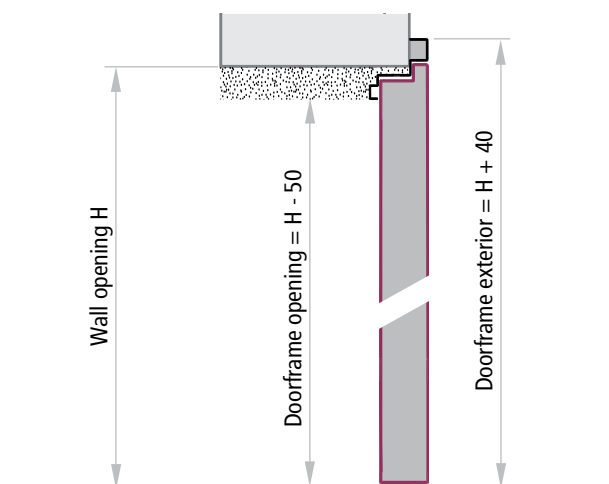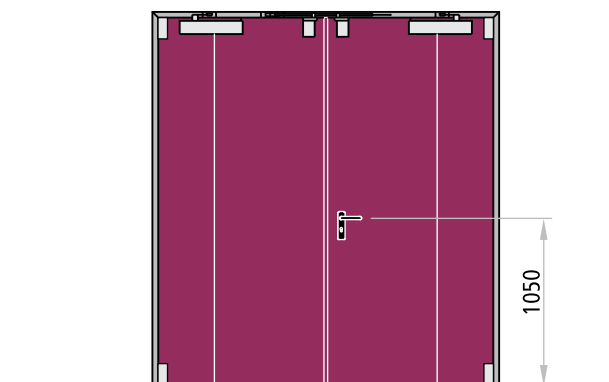


Applications


Hinged two-leaved gates with angular frame

DOORFRAME WITH ANCHORS FOR MORTAR FIXING OR FIXING WITH SCREWS AND PLUGS

Vertical cross section

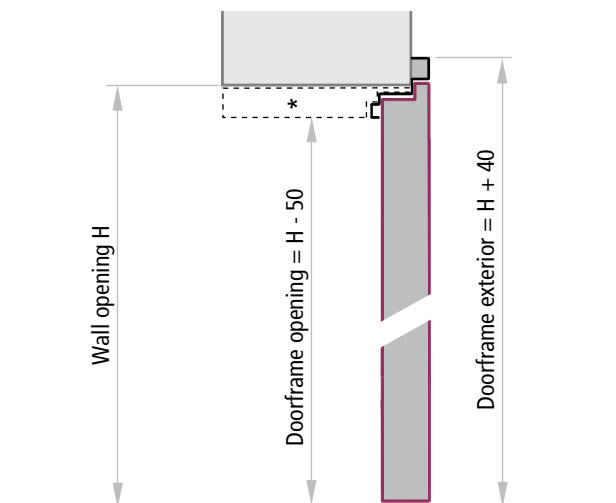


Horizontal cross section

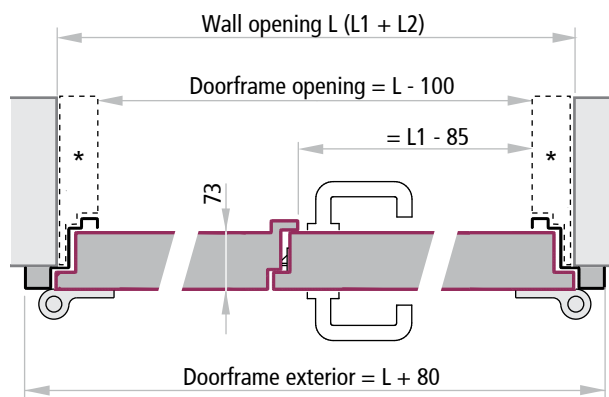


* Isolation of the doorframe or lining with frame extension IG 1 to be done by the customer.

SUBFRAME-MOUNTED DOORFRAME - IN THE REVEAL APPLICATION

Vertical cross section

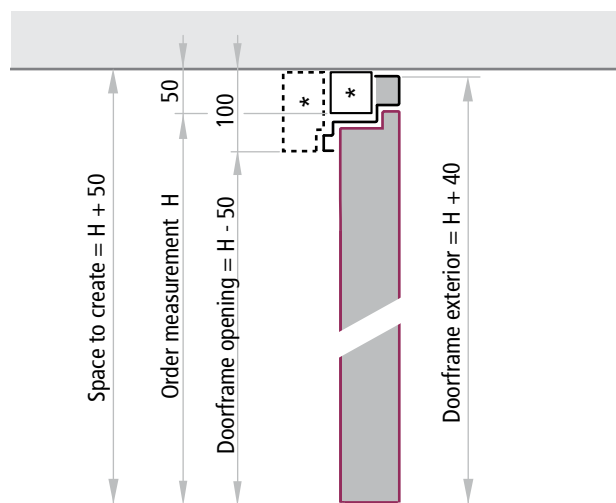

Horizontal cross section

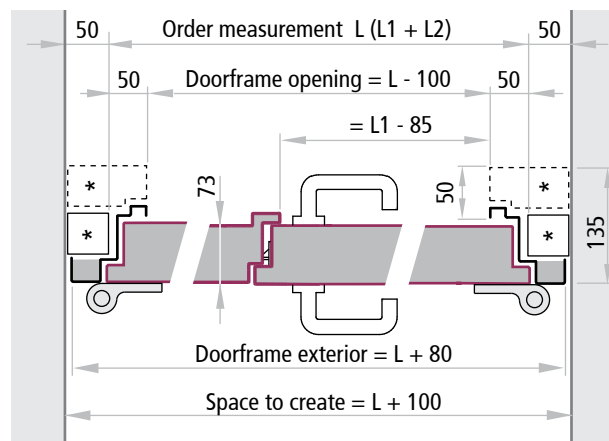


*Subframe 50x50 and plasterboard finishing are the customer's responsibility unless ordered separately (see frame extension IG 3).

Frame extensions - Overall dimensions


Hinged two-leaved gates with angular frame

FRAME EXTENSIONS FOR GATES WITH ANGULAR FRAME

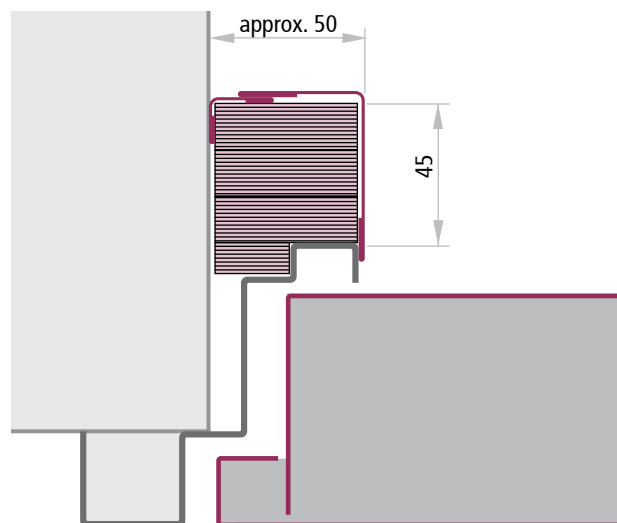

IG 1


Frame extension covering on three sides the door frame installed with wall anchors or screws and plugs. Supplied with plasterboard sheets to be installed on site, painted with epoxy-polyester powder in the same colour as the leaf.

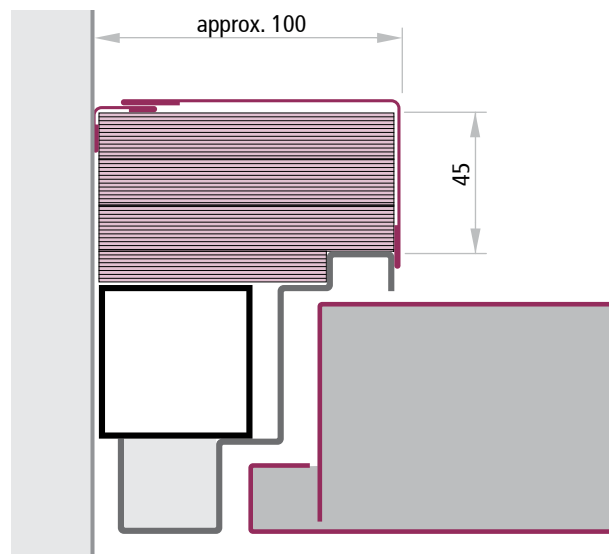

IG 3

Frame extension covering on three sides the door frame installed onto sub-frame. Supplied with plasterboard sheets to be installed on site, painted with epoxy-polyester powder in the same colour as the leaf.

TWO-LEAVED DOOR OVERALL DIMENSIONS WITH 90° OPENING

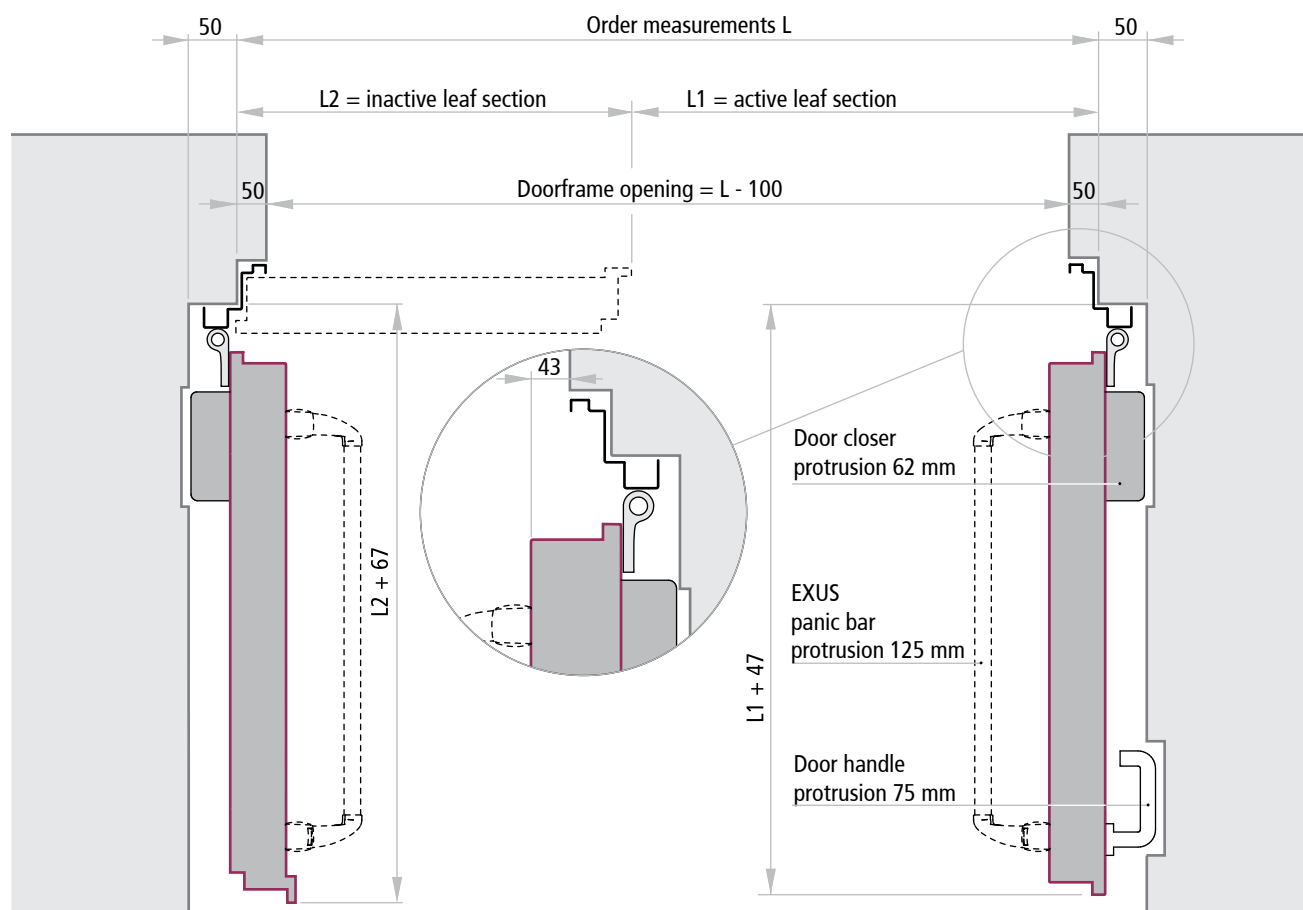

Mandatory accessories

Hinged gates with angular frame


RYOBI D-3550 DOOR CLOSER

The RYOBI D-3550 door closer has a 2 to 6 force range that can be adjusted by means of a convenient external tuning screw, is ambidextrous and is available with different accessories and color choices. It comes with an ABS design cover with a standard scissor arm.

It is also available with slide-channel, which requires ordering the D-3550T series door closer.


The RYOBI D-3550 door closer has two screws for separate regulation of the closing speed and the feed-in speed increase. It is also equipped with a regulator screw for deceleration while opening, to avoid shocks to the door, and a regulator screw for delaying the initiation of the closing cycle.

RYOBI D-3550 door closers are guaranteed for 2,000,000 operational cycles, and are certified for use with fire doors BS476 part 22/87 ANSI A 156.4 grade 1 UL and ADA, and as further assurance of their quality they are also **CE** marked 1720-CPD-0001 Rev A in accordance with EN 1154.

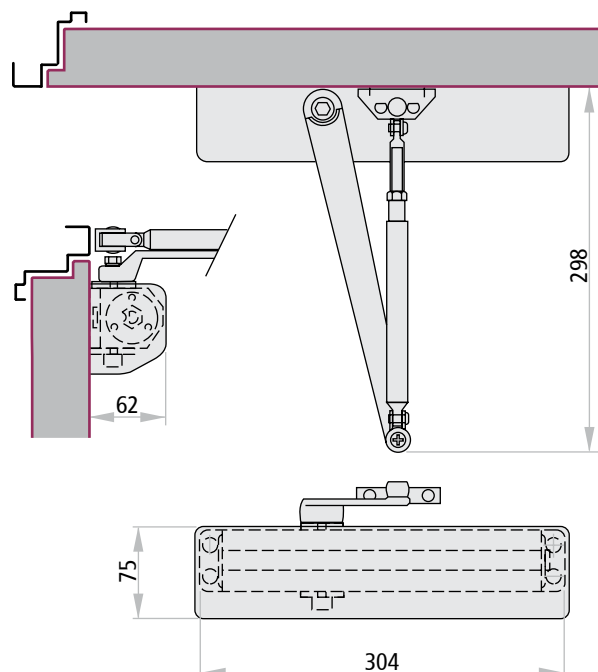

SR90 CLOSING REGULATOR



To ensure automatic closure of two-leaved fire rated gates, a door closing regulators obligatory. The two-leaved fire gates series, therefore, is provided with a Dictator SR90 closing regulator, equipped with feed-in impact absorber and all-mechanical functioning, mounted visibly on the doorframe. Silver-colored galvanized finishing and for on-site installation.

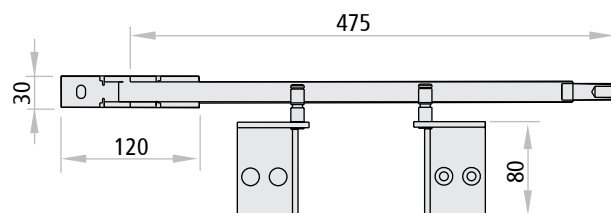

CE Certification 0432-BPR 0109.02 EN 1158:1997/A1:2004/04

VS 2000 SHOCK ABSORBER

For large doors to soften the final shock of door closure, positioned on the hinge-side of the leaf. The strike plate is attached to the doorframe.

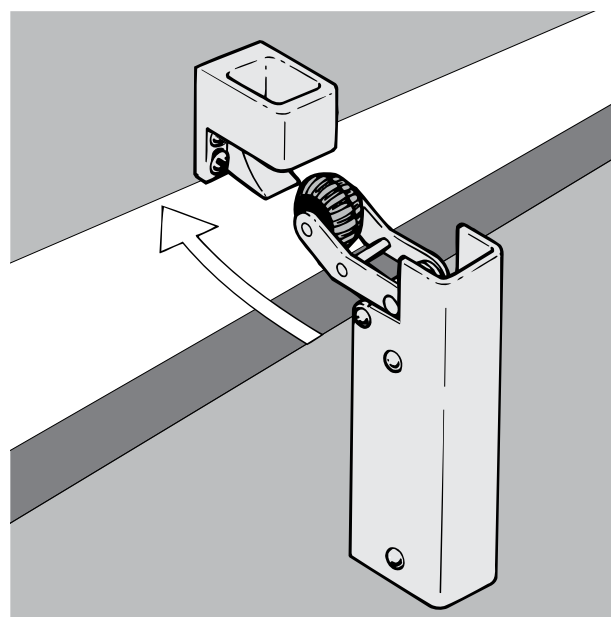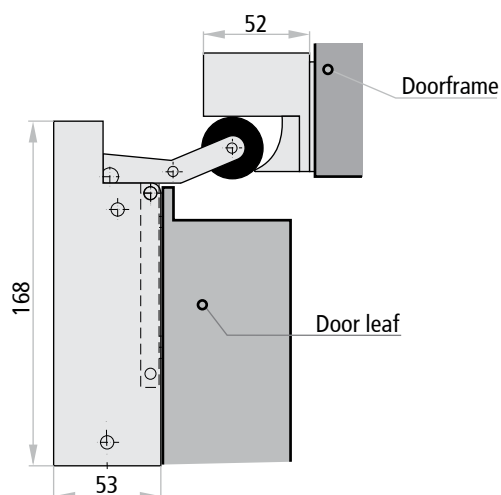

Optional accessories


Hinged gates with angular frame

ELECTROMAGNET EM/G3 WALL-MOUNTED WITH STRIKE PLATE

EM wall-mounted electromagnet with white plastic casing and unlock button. Anchor consisting of a nickel-plated plate and jointed baseboard. For smoke/heat detection systems, control unit and power supply, see the dedicated page in the accessories doors section of the present brochure.

Technical data

power supply	24 V DC
absorption	67 mA
minimum force	approx. 71 kg

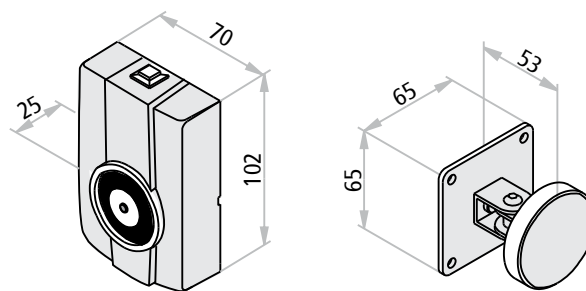


CE marked in conformity with STANDARD EN 1155.


PANIC BARS

Exus LP, LX and Twist panic bars are suitable for one-leaved gates or active and inactive leaves of two-leaved gates, with dimensions up to 2000x3000mm/leaf and masses up to 300 kg/leaf. Slash and Slash inox panic bars are suitable for the pedestrian doors only. Height of central bar from finished floor level: 955mm in case of Exus; 965mm in case of Twist; 1050mm in case of Slash.

For more information, please see the panic bars section of the present brochure. Exus LP, LX and Twist panic bars for the installation onto hinged gates are always supplied with a horizontal bar of 1500mm length and with stainless steel external door furniture.

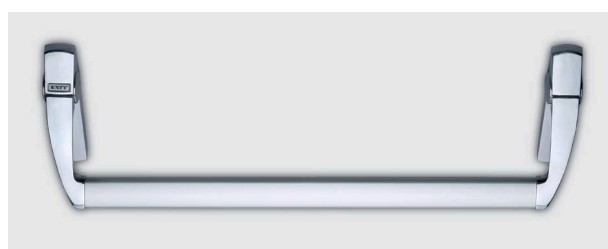

Exus LX in stainless steel

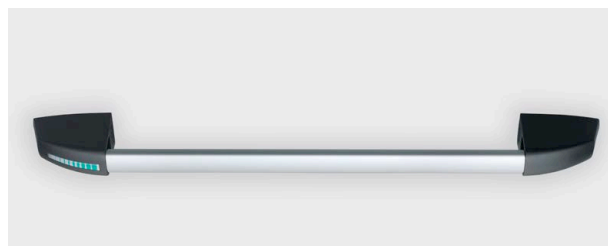

Slash with carter cover in black plastic

ATTENTION

Slash panic bars are suitable for pedestrian door only.


PEDESTRIAN DOOR WITH 15mm THRESHOLD

EL₂120 two-leaved hinged gates with angular doorframe can be equipped with pedestrian doors with a lower threshold. The right or left opening direction should be chosen by the customer and indicated while ordering. The pedestrian door series is for insertion into the inactive leaf. It opens towards the hinge-side of the gate and can be equipped with a window, on request.

For additional information concerning the panic bars, please see the dedicated pages of the present brochure.

Minimum dimensions (L2 and FM H) for the insertion of pedestrian doors:

Pedestrian door size	minimum dimensions
width 900	L2 > 1680
width 1140	L2 > 1980
height 2000	FMH > 2230

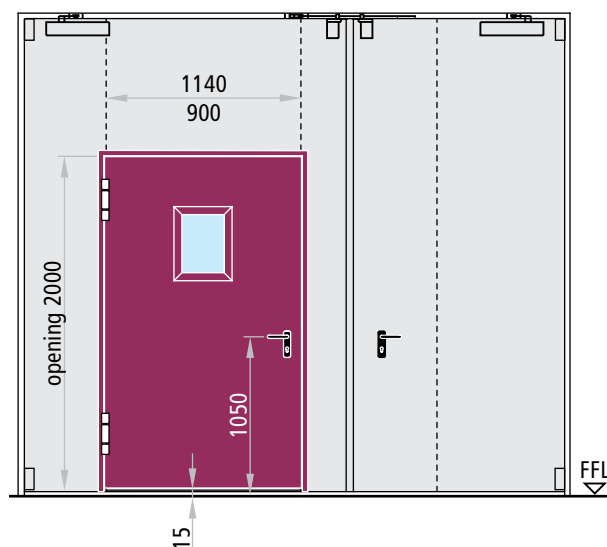

ATTENTION

Because of the bottom threshold, even though of small dimensions, in case of installation into emergency exit routes at the discretion of the customer, the latter shall assume all responsibilities.

Painting

The hinged gates series of gates is painted with thermoset powders, with anti-scratch finish and semi-glossy embossing (except for certain colors). The paint is especially resistant and offers a pleasant finish for interior applications. Choose from a wide range of RAL colors.




STANDARD COLORS WITH NO PRICE SUPPLEMENT

Interior painting with epoxy-polyester powders in turquoise pastel - light tone (NCS4020- B50G). The tonalities of the frame and the door leaf are represented in the photo to the side

Group 01:

color NCS 4020-B50G

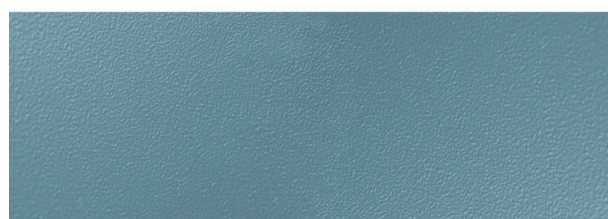

SPECIAL COLORS WITH NO PRICE SUPPLEMENT

Interior paints available in a variety of RAL colours with epoxy-polyester powders.

Group 02:

RAL	RAL	RAL	RAL	RAL	RAL	RAL
1013	5010	7016	7035	9001	9002	9010

Group 03:

RAL	RAL	RAL	RAL	RAL	RAL	RAL	RAL
1015	5024	6000	7024	7038	8011	9011	9016
RAL 9018							

SPECIAL COLORS WITH PRICE SUPPLEMENT

Interior paints available in a variety of RAL colours with epoxy-polyester powders.

SPECIAL COLORS FOR EXTERIOR USE WITH PRICE SUPPLEMENT

Exterior painting with polyester powders in various RAL colours.

SPECIAL COLORS ON REQUEST WITH PRICE SUPPLEMENT

Painting available for interior and exterior with epoxy-polyester and polyester (respectively) powders in the requested RAL colours. Group 06 does not include special colors, such as metallic, mica, smooth or wrinkled texture and other sample colours like Pantone, NCS, etc.

PRECAUTIONS

Installation

In case of exterior installation of the gates, in addition to use special paints which are especially designed for this kind of application (see groups 05 and 06), in order to avoid any product degradation, it is important to:

- protect the gates from bad weather and water seeping in;
- avoid direct sun rays and the subsequent warping of the gate leaf, especially in case of darker colors.

For more details, refer to the "Notices" section of this brochure.

Cleaning

Water and neutral soap are recommended for the regular cleaning of our products. Do not use common cleaning products (see detergents) and/or other solvents. We shall not be held responsible for any problems that arise if these guidelines are not respected.

Group 04:

RAL	RAL	RAL	RAL	RAL	RAL	RAL	RAL
1001	1003	3000	3003	3020	5012	5015	6005
RAL	RAL	RAL	RAL	RAL	RAL	RAL	RAL
7001	7004	7011	7030	7032	7037	7040	7042
RAL	RAL	RAL	RAL	RAL	RAL		
7047	8017	8019	9005	9006*	9007*		

Group 05:

RAL	RAL	RAL	RAL	RAL	RAL	RAL	RAL
1013E	3000E	5010E	6005E	7016E	7024E	7035E	9002E
RAL	RAL	NCS	NCS				
9006E*	9010E	4020E	5020E				

*pre-approval of the sample is required.

Group 06:

Colors on request only

Re-painting

- For re-painting, use the following procedure:
- sand and carefully wipe away any dust from the surfaces
- apply a base coat of semi-gloss acrylic (we recommend the product ACRILFIN SL series 567 made by ELCROM - Italy + 20% by weight aliphatic hardener series E872003)
- repaint the surfaces with your choice of lacquers or paints.

Retouching

Upon request, the company Ninz also provides touch-up colors for the required RAL colour paint (nitro/synthetic) in 60 gr. handy bottle with brush cap or in 1,00 kg can.

EXUS[®]

HINGED
gates



PRESENTATION

EXUS® panic bars

Ninz S.p.A. is a leader in fire doors, and has once again reasserted itself as a visionary company with a strong identity created by its continuous research into the design and technology of its own products, such as the new line of EXUS® panic bars.

The EXUS® panic bars are CE marked and according to European standard EN 1125:2008, which entered in effect January 01, 2010, and which prescribes a series of substantial changes that further extend the requirements for maximum safety and ease of opening.

The KIT designed for your needs

When ordered separately from the door, the EXUS® series of panic bars is provided in elegant and functional KITS packaged for presentation in the most appropriate format for distribution.

Packaging in KITS ensures customers, installers and therefore the final users that they are receiving a complete anti-panic system with fully corresponding parts which are all CE certified.

Finishing

Attention to detail and proportions are highlighted by select materials and finishing.

In addition to the **black PLASTIC** version combined with **anodized ALUMINUM** bars, new combinations include the all **brushed STAINLESS STEEL** version and the **polished chromed ALUMINUM** version combined with the **anodized ALUMINUM** bar. Many other color and surface combinations are possible for equally aesthetic solutions. The particular aesthetics of soft forms is one of the exclusive advantages of **EXUS® panic bars**, representing the fruit of designs generated in collaboration with Studio MM Design, which has been working with the company for many years.

Certifications and replacements

Given the importance of maintaining the entire system's CE conformity, special attention has been paid to replacement parts, which have been subjected to testing in accordance with the EN 1125:2008 standard due to their pivotal role in maintaining CE certification.

The only way to ensure that the products maintain their original characteristics over time is by using **original NINZ replacement parts**.

For this reason, the instructions for **EXUS® panic bars** include additional indications regarding proper installation and maintenance plus a exploded assembly drawing that specifies every smallest detail of the certified system with all of the references required for ordering replacement parts.

With the new EXUS® panic bar, NINZ S.p.A. demonstrates its willingness to believe in market development by investing in designs and company image in order to endow its own products with added value while maintaining highly competitive quality-price ratios.



Black PLASTIC handle



Brushed STAINLESS STEEL handle

NOTE

By default external door furniture is provided with the same finishing as the panic bar.


EXUS® - Features, certifications

Panic bar

NINZ
FIREDOORS

FEATURES

- Newly designed product with state of the art technological concept
- Available several in color and surface combinations: brushed stainless steel for the lever arms and the bar, or aluminum with polished chrome lever arms and anodized aluminum bar, and finally the classic ever-green combination - black plastic lever arms with anodized aluminum bar
- Certified for internal lock with 40 or 65mm entrances for single leaves or active leaves, with 30 or 80mm entrance for inactive leaves and with square spindle rotation of up to 45°
- Possibility of locking by key on the bar side as well
- Reversible for Right or Left mounting
- Protrusion 125mm
- Proposed together with the door or separately in a complete KIT packaged in a black/yellow box
- Label applied to the packaging to identify the product's characteristics
- Wide range of customizations: colored bar, colored or stainless steel handles, lock with access control mechanisms, special coded or mastered cylinders

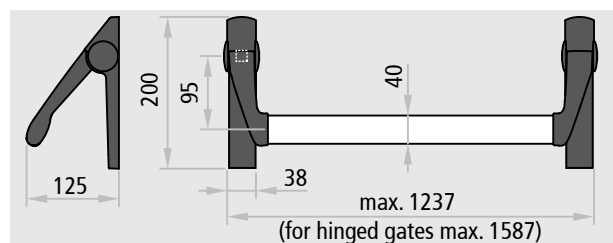

CERTIFICATION

Suited for one-leaved doors or the active and inactive leaves of two-leaved doors with dimensions up to 1350x2880mm/leaf, mass up to 300kg/leaf.


CE	
Denomination	EXUS PANIC BAR
Manufacturer	Ninz S.p.A. Corso Trento, 2/A I-38061 ALA (TN)/ITALY
Year application trademark	08
Nr. and year of the standard	EN 1125:2008
Certifying body	0425
CE certificate Nr.	0425 CPD 1228
Classification	3 7 7 B 1 3 2 1 A A

- 1st Category of use very frequent
- 2nd Durability 200.000 cycles
- 3rd Door mass over 200 kg
- 4th Suitable for fire/smoke rated doors
- 5th Safety, suitable for evacuation routes
- 6th High corrosion resistance 96 h
- 7th Material safety 1000 N
- 8th Bar protrusion up to 150 mm
- 9th Activation type with push bar
- 10th Suited for one- or two-leaved doors



EXUS® is a registered trademark owned by Ninz S.p.A.

Also suited for doors with fire ratings:



ATTESTATO DI CONFORMITÀ DIRETTIVA 89/106/CEE CERTIFICATE OF CONFORMITY DIRECTIVE 89/106/CEE		CE 0425
Questo certificato è rilasciato in conformità a quanto prescritto dall'Art.6 par.2 lettera b) del DPR 21 aprile 1993, n°246 (Direttiva 89/106/CEE) ed attesta la conformità del prodotto di seguito identificato agli Art.1, Art.2 ed allegato A del DPR 21 aprile 1993, n°246 (Direttiva 89/106/CEE). This certificate has been issued in conformity to what prescribed by the Art.6 par.2 letter b) of the DPR 21/04/1993, n°246 (Directive 89/106/CEE) and certifies the conformity of the product described below to the Art.1, Art.2 and attachment A of DPR 21/04/1993, n°246 (Directive 89/106/CEE).		
ATTESTATO N°	0425 CPD 1228	CERTIFICATE N°
Organismo notificato	ICIM S.p.A. - Piazza Don Mapelli, 75 - 20099 Sesto San Giovanni (MI) ITALY	Notified Body Identification number: 0425
Dati Fabbricante	NINZ S.p.A. Corso Trento, 2/A - 38061 ALA (TN) ITALY	Manufacturer Head office Operative unit
Dati prodotto	Product	
Tipologia	DISPOSITIVI ANTIPANICO PER USCITE DI SICUREZZA AZIONATI MEDIANTE UNA BARRA ORIZZONTALE PANIC EXIT DEVICES	
Denominazione	Dispositivo antipatico serie "TWIST" "EXUS LP" "EXUS LA" "EXUS LX".	Denominazione
Serrature antipatico	art. AP16/18, SCA 1 3201001.019020, MAC 1 3201001.041042, 4506002.17 (V), 3201001.018, 485-65-0, 4506002.22 (V), B18310-02-RIL-8 (V), B18370-04-U-8 (V), art. AP020P, AP020U, 4506002.18 (V), 3201001.6, 43190-95, B1890-1004 (V).	
Controserrature antipatico	art. 3105080, 3105024, 4506003 (V), 3305003, B1795-0001 (V), B1895-0003 (V).	
Dispositivo superiore	art. 2401036, 2401046, 2401044, 4506005 (V), 2401002, B9000-0567 (V), B9000-0490 (V).	
Riscontro asta	art. 2401001, 2401007, 3105091, 4509006 (V), 2401020, 4419008, B9028-0001 (V).	
Boccola pavimento	art. 4201010.	
Deviatori	art. 3305015, 3305016, 3305002, 4509003 (V), 3305013, 990837, B9006-0014 (V), B9006-0005 (V).	
Aste verticali	art. 2401006, 2401026, 2401015, 2401014, 4506006 (V), 2401005, 2401035, 3412001, B9000-0402 (V).	
Riscontro serratura	art. BM, BSP, BS, BMC, BC, B, A, BM inox, BM alu, BSP inox, BSP alu.	
Comandi esterni		
Sistema di attestazione della conformità	1	Attestation of conformity
Norma di riferimento	EN1125:2008	Standard
Classificazione	3 7 7 B 1 3 2 1 A A	Classification
Eventuali estensioni	Nessuna / None	Extensions
Eventuali condizioni di subordinazione della Certificazione CE	Nessuna / None	Possible conditions of subordination of the CE Certification
Il presente attestato è valido esclusivamente per il prodotto indicato. Eventuali varianti da apportare devono essere approvate da ICIM SpA. The present issue is valid only for the product described above. Possible changes to be brought in have to be approved by ICIM S.p.A.		
Data di emissione First issue	Emissione corrente Current issue	Data di scadenza Expiring date
18/04/2007	26/06/2013	17/04/2017
		ICIM S.p.A.

EXUS® LP IN BLACK PLASTIC




Description

The EXUS LP panic bar consists of an anodized aluminum horizontal bar that inserts into the lever arms attached to the mechanisms which activate the lock.

- Reversible for right or left opening
- For application to single leaf and two-leaved doors
- Suited for Rever/Univer/Proget doors and other types of panic exit doors
- The horizontal bar is made of extruded anodized aluminum with an elliptical cross-section measuring 40x20mm and a length of 1150mm
- Two black plastic lever arms with galvanized steel core
- The two mechanisms are made of galvanized steel with black plastic carter covers, one of which has an EXIT label that identifies the lock side
- The lock is anti-panic/fire rated for Euro profile cylinders
- The door furnitures and related cover plates are made of black plastic, while the installation plate is made of galvanized steel
- DC version with cylinder to pass

VERSIONS AVAILABLE




BM

BSP

BS

BMC

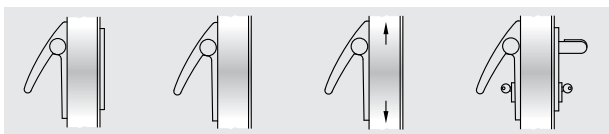


BC

B

A

DC BM

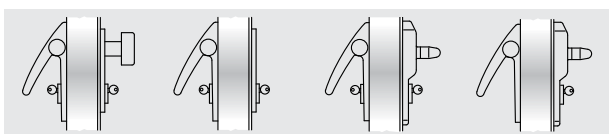

DC BSP

DC BS

DC ELM

ELM

VARIATIONS ON REQUEST (see dedicated page)

- Aluminum bar painted in RAL colors
- External BM, BSP, BS, BMC and BC door furnitures in brushed stainless steel
- External BM and BSP door furnitures painted in RAL colors
- MAC1 panic lock with access control system, combinable with the BM and DC BM versions
- Mastered or coded cylinders
- Microswitch and cable sleeve for signaling when the door is open

EXUS LP (SUPPLIED WITH THE DOOR)

For single leaf or the active leaf of two-leaved doors:

Included (mounted on the door): the anti-panic lock with 65mm entrance and the strike box lock insert

Included (in the package): Nr. 2 mechanisms, Nr. 2 black plastic carter covers, Nr. 2 black plastic lever arms, Nr. 1 anodized aluminum bar, Nr. 1 black plastic external door furniture, Nr. 1 half-cylinder with 3 keys, Nr. 1 cylinder to pass with 3 keys (DC version only), Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: BM, BSP, BS, BMC, BC, B (for Proget doors only), DC BM, DC BSP, DC BS, DC ELM, ELM

ELM electric handle: see the dedicated pages

For the inactive leaf of two-leaved doors:

Included (mounted on the door): anti-panic safety lock with 80mm entrance, the upper re-latch device, the upper strike plate and the vertical rods

Included (in the package): Nr. 2 mechanisms, Nr. 2 black plastic carter covers, Nr. 2 black plastic lever arms, Nr. 1 anodized aluminum bar, Nr. 1 floor-mounted floor catch, Nr. 1 carrier arm (for fire doors only), Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: A

EXUS LP KIT

(SUPPLIED SEPARATELY FROM THE DOOR)

KIT for single leaf or the active leaf of two-leaved doors:

Please specify leaf thickness and door type - REVER, UNIVER or PROGET - in the order

KIT contents: Nr. 1 anti-panic lock with 65mm entrance, Nr. 1 strike box lock insert, Nr. 2 mechanisms, Nr. 2 black plastic carter covers, Nr. 2 black plastic lever arms, Nr. 1 anodized aluminum bar, Nr. 1 black plastic external door furniture, Nr. 1 half-cylinder with 3 keys, Nr. 1 cylinder to pass with 3 keys (DC version only), Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: BM, BSP, BS, BMC, BC, DC BM, DC BSP, DC BS

KIT for the inactive leaf of two-leaved doors, suited for REVER, UNIVER and PROGET fire and multipurpose doors (produced after 01.01.2005):

specify door type on the order form

KIT contents: Nr. 1 anti-panic safety lock with 80mm entrance, Nr. 2 mechanisms, Nr. 2 black plastic carter covers, Nr. 2 black plastic lever arms, Nr. 1 anodized aluminum bar, Nr. 1 upper re-latch device, Nr. 1 floor-mounted floor catch, Nr. 1 carrier arm (excluding REVER and UNIVER MULTIPURPOSE), Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: A

KIT for the inactive leaf of two-leaved doors and suited for other types of multipurpose doors and for substitution of non CE marked panic bars (PROGET doors):

KIT contents: Nr. 1 anti-panic safety lock with 80mm entrance, Nr. 2 mechanisms, Nr. 2 black plastic carter covers, Nr. 2 black plastic lever arms, Nr. 1 anodized aluminum bar, Nr. 1 upper re-latch device, Nr. 1 upper strike plate, vertical rods, Nr. 1 floor-mounted floor catch, Nr. 1 carrier arm, Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: A

EXUS® LX IN STAINLESS STEEL




Description

The entire EXUS LX panic bar is made of stainless steel, and consists of a horizontal bar that inserts into lever arms attached to the mechanisms which activate the lock.

- Maximum corrosion resistance and noteworthy robustness of the entire set
- Optimal aesthetic appearance
- Reversible for right or left opening
- For application to single leaf and two-leaved doors
- Suited for Rever/Univer/Proget doors and other types of panic exit doors
- The horizontal bar is made of AISI 304 brushed stainless steel with an elliptical cross-section measuring 40x20mm, length of 1150mm
- The two lever arms are made of AISI 304 brushed stainless steel
- The two mechanisms are made of AISI 304 stainless steel
- The two carter covers are made of AISI 304 brushed stainless steel, and one is labeled with EXIT to identify the lock side
- The lock is anti-panic/fire rated for Euro profile cylinders
- The door furnitures and related cover plates are made of AISI 304 brushed stainless steel, while the installation plate is made of galvanized steel
- DC version with cylinder to pass

VERSIONS AVAILABLE

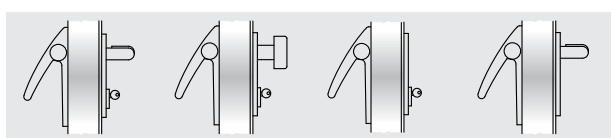


BM

BSP

BS

BMC

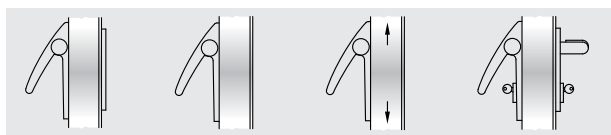


BC

B

A

DC BM

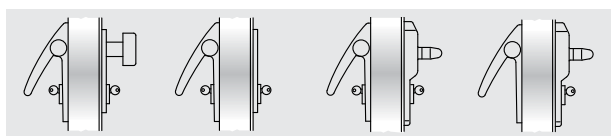

DC BSP

DC BS

DC ELM

ELM

VARIATIONS ON REQUEST (see dedicated page)

- MAC1 panic lock with access control system, combinable with the BM and DC BM versions
- Mastered or coded cylinders
- Microswitch and cable sleeve for signaling when the door is open

EXUS LX (SUPPLIED WITH THE DOOR)

For single leaf or the active leaf of two-leaved doors:

Included (mounted on the door): the anti-panic lock with 65mm entrance and the strike box lock insert

Included (in the package): Nr. 2 stainless steel mechanisms, Nr. 2 stainless steel carter covers, Nr. 2 stainless steel lever arms, Nr. 1 stainless steel bar, Nr. 1 stainless steel external door furniture, Nr. 1 half-cylinder with 3 keys, Nr. 1 cylinder to pass with 3 keys (DC version only), Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: BM, BSP, BS, BMC, BC, B (for Proget doors only), DC BM, DC BSP, DC BS, DC ELM, ELM

ELM electric handle: see the dedicated pages

For the inactive leaf of two-leaved doors:

Included (mounted on the door): anti-panic safety lock with 80mm entrance, the upper re-latch device, the upper strike plate and the vertical rods

Included (in the package): Nr. 2 stainless steel mechanisms, Nr. 2 stainless steel carter covers, Nr. 2 stainless steel lever arms, Nr. 1 stainless steel bar, Nr. 1 floor-mounted floor catch, Nr. 1 carrier arm (for fire doors only), Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: A

EXUS LX KIT

(SUPPLIED SEPARATELY FROM THE DOOR)

KIT for single leaf or the active leaf of two-leaved doors:

Please specify leaf thickness and door type - REVER, UNIVER or PROGET - in the order

KIT contents: Nr. 1 anti-panic lock with 65mm entrance, Nr. 1 strike box lock insert, Nr. 2 stainless steel mechanisms, Nr. 2 stainless steel carter covers, Nr. 2 stainless steel lever arms, Nr. 1 stainless steel bar, Nr. 1 stainless steel external door furniture, Nr. 1 half-cylinder with 3 keys, Nr. 1 cylinder to pass with 3 keys (DC version only), Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: BM, BSP, BS, BMC, BC, DC BM, DC BSP, DC BS

KIT for the inactive leaf of two-leaved doors, suited for REVER, UNIVER and PROGET fire and multipurpose doors (produced after 01.01.2005):

specify door type on the order form

KIT contents: Nr. 1 anti-panic safety lock with 80mm entrance, Nr. 2 stainless steel mechanisms, Nr. 2 stainless steel carter covers, Nr. 2 stainless steel lever arms, Nr. 1 stainless steel bar, Nr. 1 upper re-latch device, Nr. 1 floor-mounted floor catch, Nr. 1 carrier arm (excluding REVER and UNIVER MULTIPURPOSE), Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: A

KIT for the inactive leaf of two-leaved doors and suited for other types of multipurpose doors and for substitution of non CE marked panic bars (PROGET doors):

KIT contents: Nr. 1 anti-panic safety lock with 80mm entrance, Nr. 2 stainless steel mechanisms, Nr. 2 stainless steel carter covers, Nr. 2 stainless steel lever arms, Nr. 1 stainless steel bar, Nr. 1 upper re-latch device, Nr. 1 upper strike plate, vertical rods, Nr. 1 floor-mounted floor catch, Nr. 1 carrier arm, Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: A

Twist

HINGED
gates



PRESENTATION

TWIST panic bars

TWIST panic bars are **CE** marked in accordance with European standard EN 1125:2008, which entered in effect January 01, 2010, and which prescribes a series of substantial changes that further extend the requirements for maximum safety and ease of opening.

The KIT designed for your needs

When ordered separately from the door, the **TWIST** series of panic bars is provided in elegant and functional KITS packaged for presentation in the most appropriate format for distribution.

Packaging in KITS ensures customers, installers and therefore the final users that they are receiving a complete anti-panic system with fully corresponding parts that are all **CE** certified.

Finishing

The **TWIST** panic bar series is proposed in a **black PLASTIC** version combined with an **anodized ALUMINUM** bar. On request, the bar and the door furniture may be painted in RAL colors, opening up an infinite variety of aesthetic solutions.

Certifications and replacements

Given the importance of maintaining the entire system's **CE** conformity, special attention has been paid to replacement parts, which have been subjected to testing in accordance with the EN 1125:2008 standard due to their pivotal role in maintaining **CE** certification.

The only way to ensure that the products maintain their original characteristics over time is by using **original NINZ replacement parts**.

For this reason, the instructions for **TWIST** panic bars include additional indications regarding proper installation and maintenance plus an explosion assembly drawing that specifies every smallest detail of the certified system with all of the references required for ordering replacement parts.

With the new packaging of the TWIST panic bar, NINZ S.p.A. demonstrates its intent to believe in market development by investing in designs and company image in order to endow its own products with added value while maintaining highly competitive quality-price ratios.



Black PLASTIC handle

NOTE

The TWIST exit device series is combined with a black PLASTIC handle.


TWIST - Features, certifications

Panic bar

NINZ
FIREDOORS

FEATURES

- The classic line of panic bars, an ever-green, available in the standard combination with black plastic arms/caps and anodized aluminum bar
- Certified for internal locks with a 65mm entrance for single leaves or active leaves, and with an 80mm entrance for inactive leaves
- Reversible for mounting on Right or Left doors
- Protrusion 100mm
- Proposed together with the door or separately in a complete KIT packaged in a single black/green box
- Packaging is labeled to identify product characteristics
- Wide range of customizations: colored bar, colored or stainless steel handles, locks with access control systems, special coded or mastered cylinders

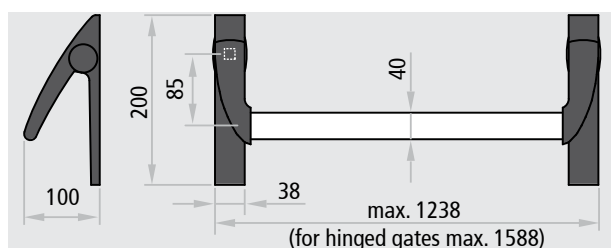

Also suited for doors with fire ratings:

EI 120 REI 120 smoke resistant



CERTIFICATION

Suited for one-leaved doors or the active and inactive leaves of two-leaved doors with dimensions up to 1350x2880mm/leaf, mass up to 300kg/leaf.

Denomination	TWIST PANIC BAR
Manufacturer	Ninz S.p.A. Corso Trento, 2/A I-38061 ALA (TN)/ITALY
Year application trademark	08
Nr. and year of the standard	EN 1125:2008
Certifying body	0425
CE certificate Nr.	0425 CPD 1228
Classification	3 7 7 B 1 3 2 1 A A

- 1st Category of use very frequent
- 2nd Durability 200.000 cycles
- 3rd Door mass over 200 kg
- 4th Suitable for fire/smoke rated doors
- 5th Safety, suitable for evacuation routes
- 6th High corrosion resistance 96 h
- 7th Material safety 1000 N
- 8th Bar protrusion up to 150 mm
- 9th Activation type with push bar
- 10th Suitable for one- or two-leaved doors

ATTESTATO DI CONFORMITÀ DIRETTIVA 89/106/CEE CERTIFICATE OF CONFORMITY DIRECTIVE 89/106/CEE		CE 0425
Questo certificato è rilasciato in conformità a quanto prescritto dall'Art.5 par.2 lettera b) del DPR 21 aprile 1993, n°246 (Direttiva 89/106/CEE) ed attesta la conformità del prodotto di seguito identificato agli Art.1, Art.2 ed allegato A del DPR 21 aprile 1993, n°246 (Direttiva 89/106/CEE)		
This certificate has been issued in conformity to what prescribed by the Art.5 par.2 letter b) of the DPR 21/04/1993, n°246 (Directive 89/106/CEE) and certifies the conformity of the product described below to the Art.1, Art.2 and attachment A of DPR 21/04/1993, n°246 (Directive 89/106/CEE)		
ATTESTATO N°	0425 CPD 1228	CERTIFICATE N°
Organismo notificato	ICIM S.p.A. - Piazza Don Mapelli, 75 - 20099 Sesto San Giovanni (MI) ITALY	Notified Body
Dati Fabbricante	NINZ S.p.A. Corso Trento, 2/A - 38061 ALA (TN) ITALY	Manufacturer
Sede legale		Head office
Unità operativa		Operative unit
Dati prodotto	Product Type	
Tipologia	DISPOSITIVI ANTIPANICO PER USCITE DI SICUREZZA AZIONATI MEDIANTE UNA BARRA ORIZZONTALE PANIC EXIT DEVICES	
Denominazione	Dispositivo antipanico serie "TWIST" "EXUS LP" "EXUS LA" "EXUS LX". Serrature antipanico art. AP16/18, SCA 1 3201001.019/020, MAC 1 3201001.041/042, 4506002.17 (V), 3201001.018, 485-65-0, 4506002.22 (V), B18310-02-R/L-8 (V), B18370-04-U-8 (V), art. AP020P, AP020U, 4506002.18 (V), 3201001.6, 43190-95, B1890.1004 (V), Controserrature antipanico art. 3105080, 3105024, 4506003 (V), 3305003, B1795.0001 (V), B1895.0003 (V), Dispositivo superiore art. 2401036, 2401046, 2401044, 4506005 (V), 2401020, B9000.0567 (V), B9000.0490 (V), Riscintro asta art. 2401001, 2401007, 3105091, 4506006 (V), 2401020, 4419008, B9028.0001 (V), Boccola pavimento art. 4201010, Deviatori art. 3305015, 3305016, 3305002, 4506003 (V), 3305013, 960837, B9006.0014 (V), B9006.0005 (V), Aste verticali art. 2401006, 2401005, 2401015, 2401014, 4506006 (V), 2401006, 2401035, 3412001, B9000.0402 (V), Riscintro serratura art. BM, BSP, BS, BMC, BC, B, A, BM inox, BM alu, BSP inox, BSP alu, Comandi esterni	Denominazione
Sistema di attestazione della conformità	1	Attestation of conformity
Norma di riferimento	EN1125:2008	Standard
Classificazione	3 7 7 B 1 3 2 1 A A	Classification
Eventuali estensioni	Nessuna / None	Extensions
Eventuali condizioni di subordinazione della Certificazione CE	Nessuna / None	Possible conditions of subordination of the CE Certification
Il presente attestato è valido esclusivamente per il prodotto indicato. Eventuali varianti da apportare devono essere approvate da ICIM S.p.A. The present issue is valid only for the product described above. Possible changes to be brought in have to be approved by ICIM S.p.A.		
Data di emissione First issue	Emissione corrente Current issue	Data di scadenza Expiring date
18/04/2007	26/06/2013	17/04/2017
		ICIM S.p.A.

TWIST IN BLACK PLASTIC




Description

The TWIST plastic panic bar consists of an anodized aluminum horizontal bar that inserts into the lever arms attached to the mechanisms used to activate the lock.

- Reversible for right or left opening
- For application to single leaf and two-leaved doors
- Suited for Rever/Univer/Proget doors and other types of panic exit doors
- The horizontal bar is made of extruded anodized aluminum with an elliptical cross-section measuring 40x20mm and a length of 1150mm
- Two black plastic lever arms with galvanized steel core
- The two mechanisms are made of galvanized steel with black plastic carter covers, one of which has an EXIT label that identifies the lock side
- The lock is anti-panic/fire resistance for Euro profile cylinders
- The door furnitures and the cover plates are made of black plastic, while the installation plate is made of galvanized steel

VERSIONS AVAILABLE

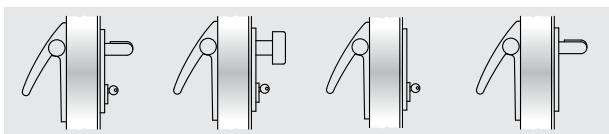


BM

BSP

BS

BMC

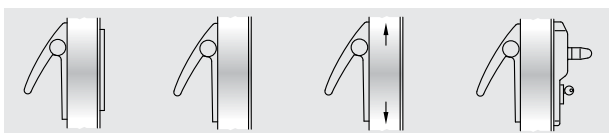

BC

B

A

ELM

VARIATIONS ON REQUEST (see dedicated page)

- Aluminum bar painted in RAL colors
- External BM, BSP, BS, BMC and BC commands in brushed stainless steel
- External BM and BSP commands painted in RAL colors
- MAC1 panic lock with access control mode, combinable with the BM version
- Mastered or encrypted cylinders
- Microswitch and cable sleeve for signaling when the door is open

TWIST (SUPPLIED WITH THE DOOR)

For single leaf or the active leaf of two-leaved doors:

Included (mounted on the door): the anti-panic lock with 65mm entrance and the strike box lock insert

Included (in the package): Nr. 2 mechanisms, Nr. 2 black plastic carter covers, Nr. 2 black plastic lever arms, Nr. 1 anodized aluminum bar, Nr. 1 black plastic external door furniture, Nr. 1 half-cylinder with 3 keys, Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: BM, BSP, BS, BMC, BC, B (for Proget doors only), ELM

ELM electric handle: see the dedicated pages

For the inactive leaf of two-leaved doors:

Included (mounted on the door): anti-panic safety lock with 80mm entrance, the upper re-latch device, the upper strike plate and the vertical rods

Included (in the package): Nr. 2 mechanisms, Nr. 2 black plastic carter covers, Nr. 2 black plastic lever arms, Nr. 1 anodized aluminum bar, Nr. 1 floor-mounted door catch, Nr. 1 carrier arm (for fire doors only), Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: A

TWIST KIT

(SUPPLIED SEPARATELY FROM THE DOOR)

KIT for single leaf or the active leaf of two-leaved doors:

Please specify leaf thickness and door type - REVER, UNIVER or PROGET - in the order

KIT contents: Nr. 1 anti-panic lock with 65mm entrance, Nr. 1 strike box lock insert, Nr. 2 mechanisms, Nr. 2 black plastic carter covers, Nr. 2 black plastic lever arms, Nr. 1 anodized aluminum bar, Nr. 1 black plastic external door furniture, Nr. 1 half-cylinder with 3 keys, Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: BM, BSP, BS, BMC, BC

KIT for the inactive leaf of two-leaved doors, suited for REVER, UNIVER and PROGET fire and multipurpose doors (produced after 01.01.2005): specify door type on the order form


KIT contents: Nr. 1 anti-panic safety lock with 80mm entrance, Nr. 2 mechanisms, Nr. 2 black plastic carter covers, Nr. 2 black plastic lever arms, Nr. 1 anodized aluminum bar, Nr. 1 upper re-latch device, Nr. 1 floor-mounted floor catch, Nr. 1 carrier arm (excluding REVER and UNIVER MULTIPURPOSE), Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: A

KIT for the inactive leaf of two-leaved doors and suited for other types of multipurpose doors and for substitution of non CE marked panic bars (PROGET doors):

KIT contents: Nr. 1 anti-panic safety lock with 80mm entrance, Nr. 2 mechanisms, Nr. 2 black plastic carter covers, Nr. 2 black plastic lever arms, Nr. 1 anodized aluminum bar, Nr. 1 upper re-latch device, Nr. 1 upper strike plate, vertical rods, Nr. 1 floor-mounted floor catch, Nr. 1 carrier arm, Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: A

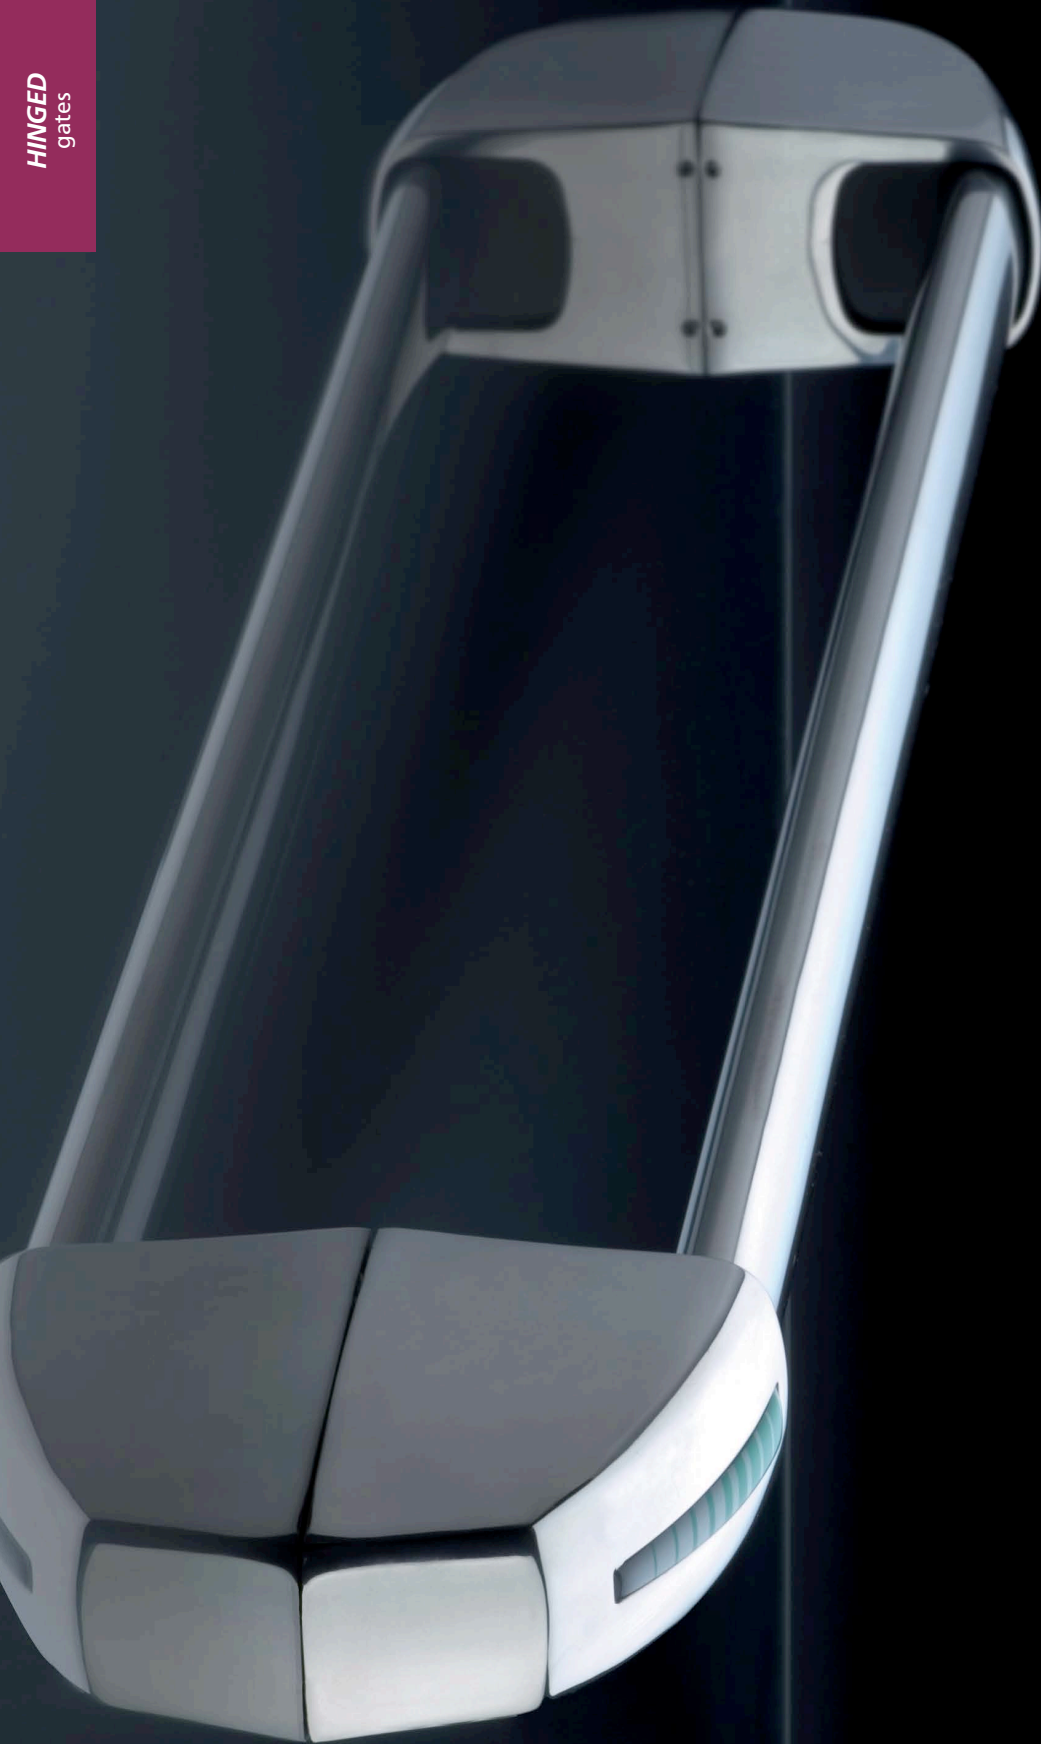

PRESENTATION

SLASH panic bars

Ninz S.p.A. is a leader in fire doors, and has once again reasserted itself as a visionary company with a strong identity created by its continuous research into the design and technology of its own products, such as the new line of SLASH panic bars.

All SLASH handles are **CE** marked and pre-certified according to European standard EN 1125:2008, which entered in effect January 01, 2010, to prescribe a series of substantial changes that further extend the requirements for maximum safety and ease of opening.

The KIT designed for your needs

When ordered separately from the door, the **SLASH** series of panic bars is provided in elegant and functional KITS packaged for presentation in the most appropriate distribution format.

Packaging in KITS ensures customers, installers and therefore the final users that they are receiving a complete anti-panic system with fully corresponding parts that are all **CE** certified.

Finishing

In addition to the **black PLASTIC** version combined with **anodized ALUMINUM** bars, new combinations include the **brushed STAINLESS STEEL** version and the **polished chromed ALUMINUM** version combined with the **anodized ALUMINUM** bar. Many other color and surface combinations are possible for equally aesthetic solutions.

Certifications and replacements

Given the importance of maintaining the entire system's **CE** conformity, special attention has been paid to replacement parts, which have been subjected to testing in accordance with the EN 1125:2008 standard due to their pivotal role in maintaining **CE** certification.

The only way to ensure that the products maintain their original characteristics over time is by using **original NINZ replacement parts**.

For this reason, the instructions for **SLASH** panic bars include additional indications regarding proper installation and maintenance plus a blow-up drawing that specifies every smallest detail of the certified system with all of the references required for ordering replacement parts.

With the expansion of the line and the new packaging of the SLASH panic bar, NINZ S.p.A. demonstrates its faith in market development by investing in designs and company image in order to endow its fire doors and the series of accessories with added value while continuing to maintain highly competitive quality-price ratios.



Black PLASTIC handle



Brushed STAINLESS STEEL handle

NOTE

By default external door furniture is provided with the same finishing as the panic bar.


SLASH - Features, certifications

Panic bar

NINZ
FIREDOORS

FEATURES

- Panic bar that stands out from the others due to its particular design and the rounded shapes of the carters. This characteristic not only improves aesthetic appeal, but it also eliminates any risk of injury during use
- Available in different color and surface combinations, in brushed stainless steel for the cover carters and the bar, or with polished chromed aluminum carters and anodized aluminum bar, and then there is always the classic combination that is still in fashion - black plastic carters with anodized aluminum bar
- Certified for internal locks with a 65mm entrance for single leaves or active leaves, and with an 80mm entrance for inactive leaves
- Reversible for Right or Left mounting
- Protrusion 75mm
- Proposed together with the door or separately in a complete KIT packaged in a single black/orange box
- Label applied to the packaging to identify the product's characteristics
- Wide range of customizations: colored bar, colored or stainless steel handles, lock with access control mechanisms, special encrypted or mastered cylinders

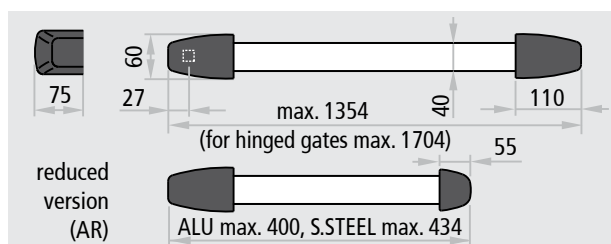

CERTIFICATION

Suited for one-leaved doors or the active and inactive leaves of two-leaved doors with dimensions up to 1350x2880mm/leaf, mass up to 300kg/leaf.

CE	
Denomination	SLASH PANIC BAR
Manufacturer	Ninz S.p.A. Corso Trento, 2/A I-38061 ALA (TN)/ITALY
Year application trademark	08
Nr. and year of the standard	EN 1125:2008
Certifying body	0425
CE certificate Nr.	1308-CPD-2007
Classification	3 7 7 B 1 3 2 2 B A

- 1st Category of use very frequent
- 2nd Durability 200.000 cycles
- 3rd Door mass over 200 kg
- 4th Suitable for fire/smoke rated doors
- 5th Safety, suitable for evacuation routes
- 6th High corrosion resistance 96 h
- 7th Material safety 1000 N
- 8th Bar protrusion up to 100 mm
- 9th Activation type with touch bar
- 10th Suitable for one- or two-leaved doors



Also suited for doors with classifications up to:

EI₂120
 REI 120
 smoke resistant



ATTESTATO DI CONFORMITÀ DIRETTIVA 89/106/CEE CERTIFICATE OF CONFORMITY DIRECTIVE 89/106/CEE			CE 0425
Questo certificato è rilasciato in conformità a quanto prescritto dall'Art.8 par.2 lettera b) del DPR 21 aprile 1993, n°246 (Direttiva 89/106/CEE) ed attesta la conformità del prodotto di seguito identificato agli Art.1, Art.2 ed allegato A del DPR 21 aprile 1993, n°246 (Direttiva 89/106/CEE). This certificate has been issued in conformity to what prescribed by the Art.6 par.2 letter b) of the DPR 21/04/1993, n°246 (Directive 89/106/EEC) and certifies the conformity of the product described below to the Art.1, Art.2 and attachment A of DPR 21/04/1993, n°246 (Directive 89/106/EEC).			
ATTESTATO N°	1308 - CPD - 2007	CERTIFICATE N°	
Organismo notificato	ICIM S.p.A. - Piazza Don Mapelli, 75 - 20099 Sesto San Giovanni (MI) ITALY	Notified Body	Identification number: 0425
Dati Fabbricante	NINZ S.p.A. Corso Trento, 2/A 38061 ALA (TN) ITALY	Manufacturer	Head office
Sede legale		Operative unit	
Dati prodotto		Product	
Tipologia		Type	
DISPOSITIVI ANTIPANICO PER USCITE DI SICUREZZA AZIONATI MEDIANTE UNA BARRA ORIZZONTALE PANIC EXIT DEVICES			
Denominazione	Dispositivo antipanico	Modelli "SLASH", "SLASH AR", "SLASH ALU", "SLASH ALU AR", "SLASH INOX", "SLASH INOX AR"	Denominazione
Serratura antipanico	art. AP18/18, SCA 1 3201001.019020, MAC 1 3201001.041042, 3201001.018, 405/55-0		
Controserratura antipanico	art. AP020P, AP020U, 3201001.6, 43190-95.		
Dispositivo superiore	art. 3105080, 3105024, 3305003.		
Riscontro asta	art. 2401006, 2401046, 2401044, 2401002.		
Boccola pavimento	art. 2401001, 2401007, 3105091, 2401020, 4419008.		
Deviatori	art. 4201010.		
Aste verticali	art. 3305015, 3305016, 3305002, 3305013, 990837.		
Riscontro serratura	art. 2401006, 2401005, 2401015, 2401014, 2401006, 2401035, 3412001.		
Comandi esterni	art. BM, BSP, BS, BMC, BC, B, A, BM inox, BM alu, BSP inox, BSP alu.		
Sistema di attestazione della conformità		Attestation of conformity	
Norma di riferimento		Standard	
EN1125:2008			
Classificazione		Classification	
3 7 7 B 1 3 2 2 B A			
Eventuali estensioni		Extensions	
Nessuna / None			
Eventuali condizioni di subordinazione della Certificazione CE		Possible conditions of subordination of the CE Certification	
Nessuna / None			
Il presente attestato è valido esclusivamente per il prodotto indicato. Eventuali varianti da apportare devono essere approvate da ICIM SpA. The present issue is valid only for the product described above. Possible changes to be brought in have to be approved by ICIM SpA.			
Data di emissione First issue	Emissione corrente Current issue	Data di scadenza Expiring date	
31/05/2007	04/08/2010	30/05/2017	
			Ing. Tullio Badino

SLASH IN BLACK PLASTIC




Description

The SLASH panic bar consists of an anodized aluminum horizontal bar and an internal connection tube that inserts into the mechanisms which activate the lock.

- Reversible for right or left opening
- For application to single leaf and two-leaved doors
- Suited for Rever/Univer/Proget doors and other types of panic exit doors
- The horizontal bar is made of extruded anodized aluminum with an elliptical cross-section measuring 40x20mm and a length of 1150mm, equipped with a connection tube
- The two mechanisms are made of galvanized steel with black plastic carter covers, one of which has a green label that identifies the lock side
- The lock is anti-panic/fire rated for Euro profile cylinders
- The door furnitures and the cover plates are made of black plastic, while the installation plate is made of galvanized steel

VERSIONS AVAILABLE

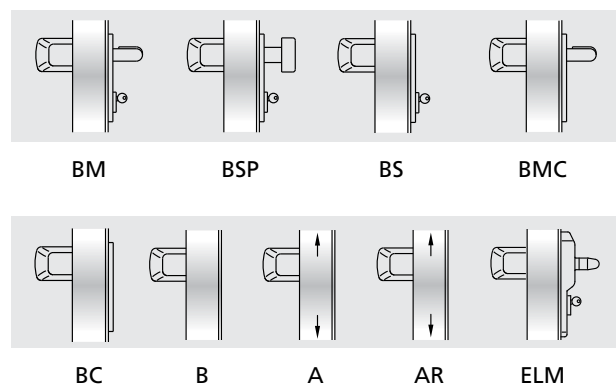

VARIATIONS ON REQUEST (see dedicated page)

- Aluminum bar painted in RAL colors
- External BM, BSP, BS, BMC and BC commands in brushed stainless steel
- External BM and BSP commands painted in RAL colors
- MAC1 panic lock with access control mode, combinable with BM versions
- Mastered or encoded cylinders
- Microswitch and cable sleeve for signaling when the door is open

SLASH (SUPPLIED WITH THE DOOR)

For single leaf or the active leaf of two-leaved doors:

Included (mounted on the door): the anti-panic lock with 65mm entrance and the strike box lock insert

Included (in the package): Nr. 2 mechanisms, Nr. 2 black plastic carter covers, Nr. 1 anodized aluminum bar with connection tube and spacer, Nr. 1 hole cover in RAL 9006 colored plastic with base plate (for REVER and UNIVER doors), Nr. 1 black plastic external door furniture, Nr. 1 half-cylinder with 3 keys, Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: BM, BSP, BS, BMC, BC, B (for Proget doors only), ELM ELM electric handle: see the dedicated pages

For the inactive leaf of two-leaved doors:

Included (mounted on the door): anti-panic safety lock with 80mm entrance, the upper re-latch device, the upper strike plate and the vertical rods

Included (in the package): Nr. 2 mechanisms, Nr. 2 black plastic carter covers, Nr. 1 anodized aluminum bar with connection tube and spacer, Nr. 1 floor-mounted floor catch, Nr. 1 carrier arm (for fire doors only), Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: A, AR (reduced) for inactive leaves with FM L2 width ≤ 500mm

SLASH KIT

(SUPPLIED SEPARATELY FROM THE DOOR)

KIT for single leaf or the active leaf of two-leaved doors:

Please specify leaf thickness and door type - REVER, UNIVER or PROGET - in the order

KIT contents: Nr. 1 anti-panic lock with 65mm entrance, Nr. 1 strike box lock insert, Nr. 2 mechanisms, Nr. 2 black plastic carter covers, Nr. 1 anodized aluminum bar with connection tube and spacer, Nr. 1 hole cover in RAL 9006 colored plastic with base plate, Nr. 1 black plastic external door furniture, Nr. 1 half-cylinder with 3 keys, Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: BM, BSP, BS, BMC, BC

KIT for the inactive leaf of two-leaved doors, suited for REVER, UNIVER and PROGET fire and multipurpose doors (produced after 01.01.2005):

KIT contents: Nr. 1 anti-panic safety lock with 80mm entrance, Nr. 2 mechanisms, Nr. 2 black plastic carter covers, Nr. 1 anodized aluminum bar with connection tube and spacer, Nr. 1 upper re-latch device, Nr. 1 floor-mounted floor catch, Nr. 1 carrier arm (excluding REVER and UNIVER MULTIPURPOSE), Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: A, AR (reduced) for use with inactive leaves with FM L2 width ≤ 500mm

KIT for the inactive leaf of two-leaved doors and suited for other types of multipurpose doors and for substitution of non CE marked panic bars (PROGET doors):

KIT contents: Nr. 1 anti-panic safety lock with 80mm entrance, Nr. 2 mechanisms, Nr. 2 black plastic carter covers, Nr. 1 anodized aluminum bar with connection tube and spacer, Nr. 1 upper re-latch device, Nr. 1 upper strike plate, vertical rods, Nr. 1 floor-mounted floor catch, Nr. 1 carrier arm, Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: A, AR (reduced) for use with inactive leaves with FM L2 width ≤ 500mm

SLASH IN STAINLESS STEEL




Description

The SLASH STAINLESS STEEL panic bar consists of a stainless steel horizontal bar and an internal connection tube that inserts into the mechanisms which activate the lock.

- Optimal corrosion and shock resistance
- State of the art aesthetics
- Secure attachment of carter covers
- Reversible for right or left opening
- For application to single leaf and two-leaved doors
- Suited for Rever/Univer/Proget doors and other types of panic exit doors
- The horizontal bar is made of AISI 304 brushed stainless steel with a 40x20mm elliptical cross-section and a length of 1150mm, equipped with a connection tube
- The two mechanisms are made of galvanized steel with AISI 304 stainless steel cover plates, one of which has a green label that identifies the lock side
- The lock is anti-panic/fire rated for Euro profile cylinders
- The external door furnitures and related cover plates are made of AISI 304 brushed stainless steel, while the installation plate is made of galvanized steel

VERSIONS AVAILABLE

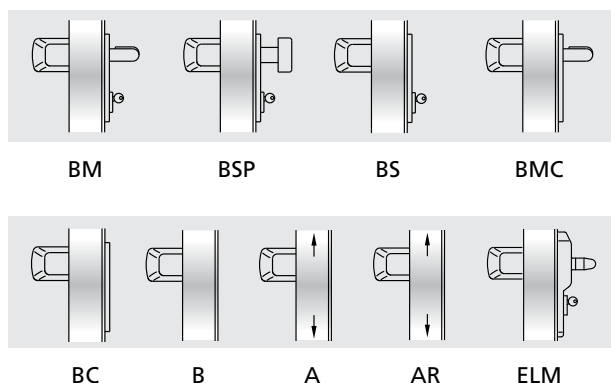

VARIATIONS ON REQUEST (see dedicated page)

- MAC1 panic lock with access control system, combinable with BM versions
- Mastered or coded cylinders
- Microswitch and cable sleeve for signaling when the door is open

SLASH STAINLESS STEEL (SUPPLIED WITH THE DOOR)

For single leaf or the active leaf of two-leaved doors:

Included (mounted on the door): the anti-panic lock with 65mm entrance and the strike box lock insert

Included (in the package): Nr. 2 mechanisms, Nr. 2 stainless steel carter covers, Nr. 1 stainless steel bar with connection tube and spacer, Nr. 1 hole cover in black-colored plastic with base plate (for REVER and UNIVER doors), Nr. 1 stainless steel external door furniture, Nr. 1 half-cylinder with 3 keys, Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: BM, BSP, BS, BMC, BC, B (for Proget doors only), ELM electric handle: see the dedicated pages

For the inactive leaf of two-leaved doors:

Included (mounted on the door): anti-panic safety lock with 80mm entrance, the upper re-latch device, the upper strike plate and the vertical rods

Included (in the package): Nr. 2 mechanisms, Nr. 2 stainless steel carter covers, Nr. 1 stainless steel bar with connection tube and spacer, Nr. 1 floor-mounted floor catch, Nr. 1 carrier arm (for fire doors only), Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: A, AR (reduced) for inactive leaves with FM L2 width ≤ 500mm

SLASH STAINLESS STEEL KIT

(SUPPLIED SEPARATELY FROM THE DOOR)

KIT for single leaf or the active leaf of two-leaved doors:

Please specify leaf thickness and door type - REVER, UNIVER or PROGET - in the order

KIT contents: Nr. 1 anti-panic lock with 65mm entrance, Nr. 1 strike box lock insert, Nr. 2 mechanisms, Nr. 2 stainless steel carter covers, Nr. 1 stainless steel bar with connection tube and spacer, Nr. 1 hole cover in black plastic with base plate, Nr. 1 stainless steel door furniture, Nr. 1 half-cylinder with 3 keys, Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: BM, BSP, BS, BMC, BC

KIT for the inactive leaf of two-leaved doors, suited for REVER, UNIVER and PROGET fire and multipurpose doors (produced after 01.01.2005):

specify door type on the order form
KIT contents: Nr. 1 anti-panic safety lock with 80mm entrance, Nr. 2 mechanisms, Nr. 2 stainless steel carter covers, Nr. 1 stainless steel bar with connection tube and spacer, Nr. 1 upper re-latch device, Nr. 1 floor-mounted floor catch, Nr. 1 carrier arm (excluding REVER and UNIVER MULTIPURPOSE), Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: A, AR (reduced) for use with inactive leaves with FM L2 width ≤ 500mm

KIT for the inactive leaf of two-leaved doors and suited for other types of multipurpose doors and for substitution of non CE marked panic bars (PROGET doors):

KIT contents: Nr. 1 anti-panic safety lock with 80mm entrance, Nr. 2 mechanisms, Nr. 2 stainless steel cover plates, Nr. 1 stainless steel bar with connection tube and spacer, Nr. 1 upper re-latch device, Nr. 1 upper strike plate, vertical rods, Nr. 1 floor-mounted floor catch, Nr. 1 carrier arm, Nr. 1 drilling template, Nr. 1 adhesive pictogram (green arrow), Nr. 1 set of installation/maintenance instructions

Versions available: A, AR (reduced) for use with inactive leaves with FM L2 width ≤ 500mm


C2 MONO-ZONE CENTRAL UNIT

Certified in accordance with EN 54-2 and EN 54-4 standards. The central unit designed and built in conformity with UNI EN 54 standards, which regulate unit for fire alarms and related accessories which each must conform with EN 54 standards.

To use for the management of the door-holding electromagnets for fire-rated closures. Control all outputs towards the heat and smoke detectors, the alarm activation/reset buttons, the external siren and the charge of buffer batteries. Any breakdown or malfunction is signaled by LED on the front panel, and by internal acoustic signal for specific cases. There are three ways to reset alarm or breakdown signal: by a button located near the central unit, or by two other buttons of the front panel, one of which can be activated with key only.

Technical data

model	52002
primary power supply	230V AC, 100mA, 50-60Hz
auxiliary power supply	2 batteries, 12V DC - 1,1 ÷ 1,3 Ah
„I“ current	min. 264mA ÷ max. 424mA
maximum output current battery	300mA
buffer battery charger output	24V DC (27.6V DC)
protection rating	IP30
operational temperature	-5°C ÷ +40°C
operational zones	single zone (mono-zone)
acoustic alarm	internal buzzer
"low battery" signal	intermittent internal buzzer
CE certification	0051-CPD-0264
conformity with standards	EN 54-2 + A1:2006 EN 54-4:1997 + A1:2002 + A1:2006



ATTENTION

According to standard EN 54-4, it is obligatory for the mono-zone central unit to be equipped with:

- Nr. 1 heat/smoke detector RFC certif. EN 54-7
- Nr. 1 pair of buffer batteries
- Nr. 1 external electronic siren certif. EN 54-3
- Nr. 1 alarm activation button certif. EN 54/11
- Nr. 1 fire/failure alarm deactivation button

MANAGES

- max. Nr. 5 RFC heat/smoke detectors
- max. Nr. 5 alarm activation buttons
- max. Nr. 2 electronic sirens
- Nr. 4 EM or EMP or EMr electromagnets
- Nr. 2 buffer batteries

BUFFER BATTERIES

Pair of rechargeable buffer batteries, 12V DC - 1.2Ah




RFC HEAT AND SMOKE DETECTOR

Certified in accordance with EN 54-7 standard.
RFC heat and smoke detector characterized by white ABS casing. Optical/thermic operation with intervention temperature to be set between 54 and 65°C. To ensure proper functioning, the detectors must be subjected to regular 6-month maintenance checks. Please note that it is inadvisable to position the sensor where strong air currents are present.

Technical data

operational voltage	11 ÷ 33V DC, typically 24V DC
consumption at rest, at 24V DC	67µA
absorption of alarm at 24V DC	45mA
operational temperature	-20°C ÷ +70°C
conformity with standards	EN 54-7




ELECTRONIC SIREN

In red color ABS, includes a volume control function for installation in internal and external environments. The connection is made using double clamps (6) for branching. With 28 or 32 selectable tones and a second tone for two-phase alarms.

Technical data

power supply	9 ÷ 28V DC
absorption by alarm at 12V DC	8mA
absorption by alarm at 24V DC	16mA
protection rating	IP65
operational temperature	-25°C ÷ +70°C
conformity with standard	EN 54-3




ALARM ACTIVATION BUTTON

In red color ABS with a weight of 110 gr. Pressure on the plastic front plate activates the electrical contact. Re-arming of the contact is executed manually using a key (provided).

Technical data

power supply	max. 30V DC
protection rating	IP41
operational temperature	max. +65°C
internal exchange contact	n.o./n.c.
conformity with standard	EN 54-11





Ninz S.p.A. | Corso Trento 2/A | I-38061 Ala (TN)
Tel. +39 0464 678 300 | Fax +39 0464 679 025
info@ninz.it | www.ninz.it